


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

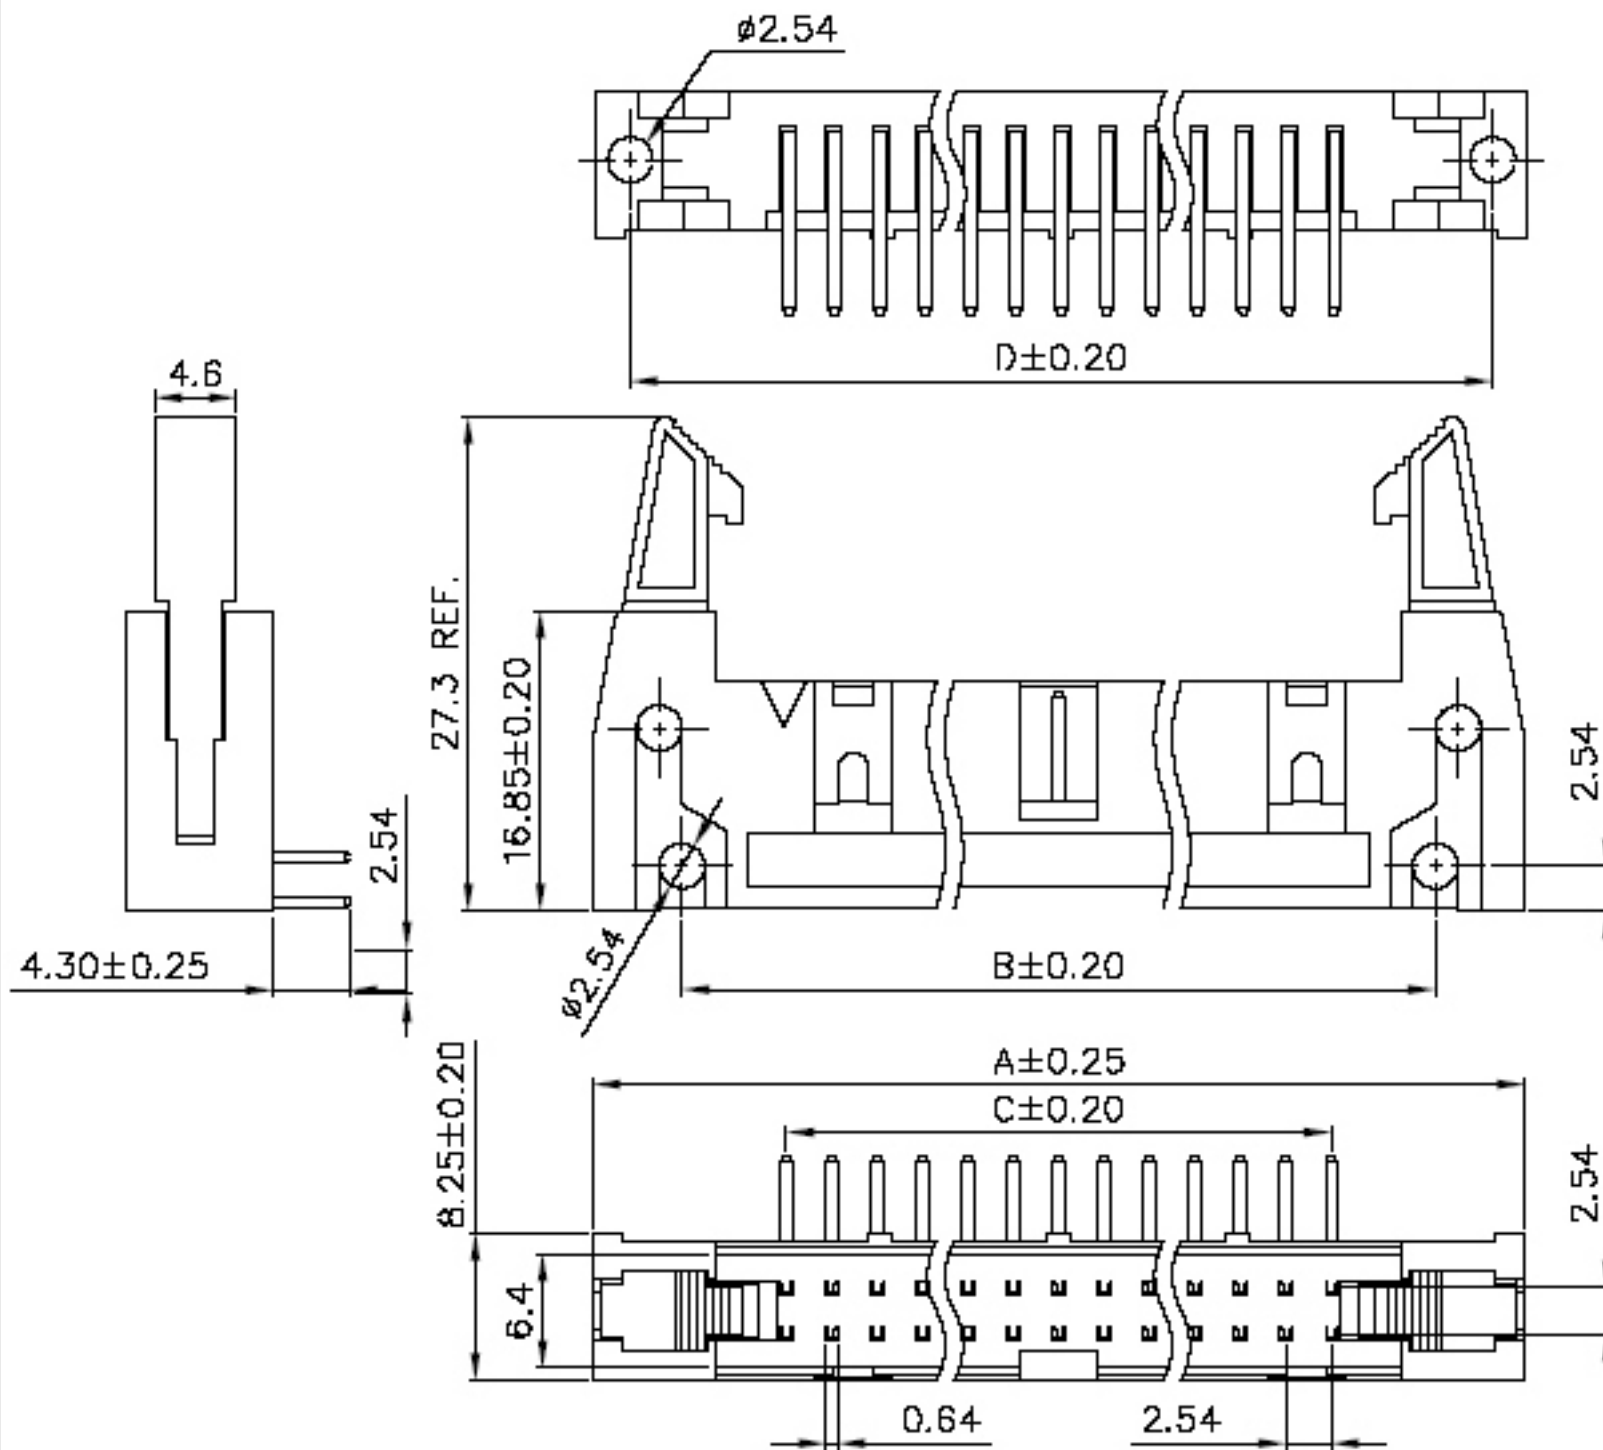

Specification:

Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000MΩ Min. at DC 500V.
 Contact Resistance: 15mΩ Max.
 Operating Temperature: -40°C ~ +105°C.

HOW TO ORDER:
MX-2216-[]-[]-[]-[]-[]
1 2 3 4 5

- 1- Pin Style
(R)-90°
(S)-180°
- 2- Nr. of Ways
Table
- 3- Terminal Plating:
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 4- Latch:
(00)-W/O Latch
(01)-Short Latch
(02)-Long Latch
- 5- (R) RoHS Compliant

Pos.	Dim. A	Dim. B	Dim. C	Dim. D	Pos.	Dim. A	Dim. B	Dim. C	Dim. D
10	31.90	21.84	10.16	27.94	30	57.30	47.24	35.56	53.34
14	36.98	26.92	15.24	33.02	34	62.38	52.32	40.64	58.42
16	39.52	29.46	17.78	35.56	40	70.00	59.94	48.26	66.04
20	44.60	34.54	22.86	40.64	50	82.70	72.64	60.96	78.74
24	49.68	39.62	27.94	45.72	60	95.40	85.34	73.66	91.44
26	52.22	42.16	30.48	48.26	64	100.48	90.42	78.74	96.52

MATRIX **MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE	TITLE 2.54mm Ejector Box Header 90°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY Diego