



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

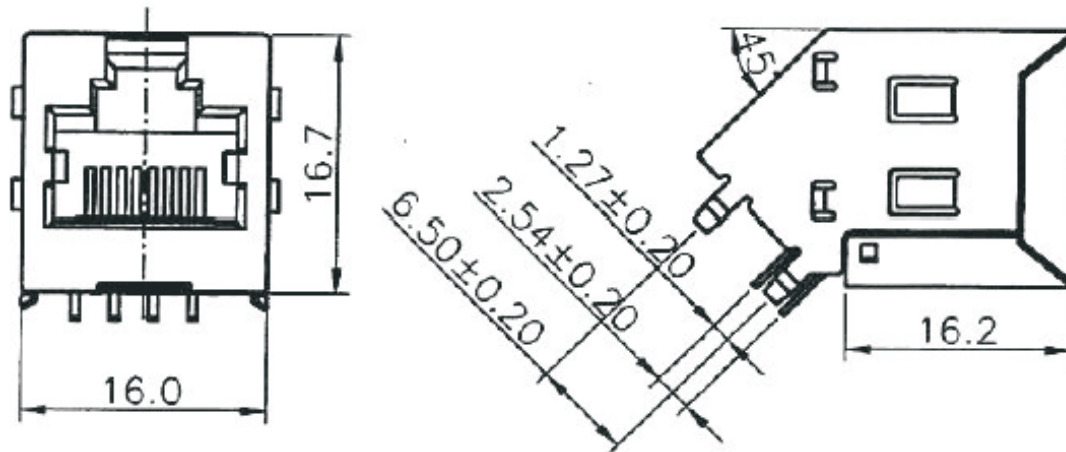



Housing : Standard Material  
Glass Filled Polyester UL94V-0  
Standard Colour : Black  
Contact : 0.35mm Thickness Phosphor  
Bronze Alloy Selective  
Gold Plating Over Nickel Over Tin  
Shield : 0.25mm Brass Tin Plated

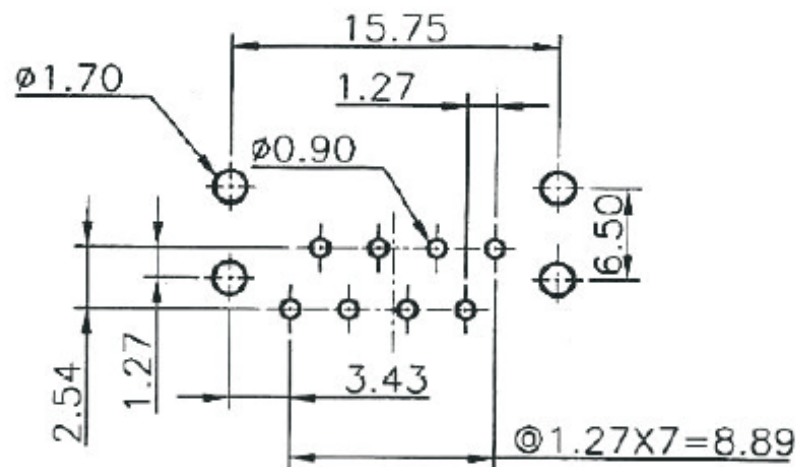

PC Board Layout

### HOW TO ORDER: 2002[ ] [ ] [Y]56R 1 2 3

- 1- No. Contact  
(8P4C)  
(8P6C)  
(8P8C)
- 2- Contact Plating:  
( )-Gold 6U"  
(15)-Gold 15U"  
(30)-Gold 30U"  
(50)-Gold 50U"
- 3- Body Option:  
(Y)-With Fully Shielded

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>		UNIT	SCALE	TITLE	DATE
		mm		Fully Shielded 45° Entry P.C.B. Jack	DECEMBER 2009
		TOLERANCE: ±0.25			APP. BY
		MATL		CHK. BY	
		DWG. NO.		DR. BY <b>Felipe</b>	