


| REV | ECN. NO. | APP | DATE |
|-----|----------------|-----|------|
| A | EDIÇÃO INICIAL | | |
| | | | |
| | | | |

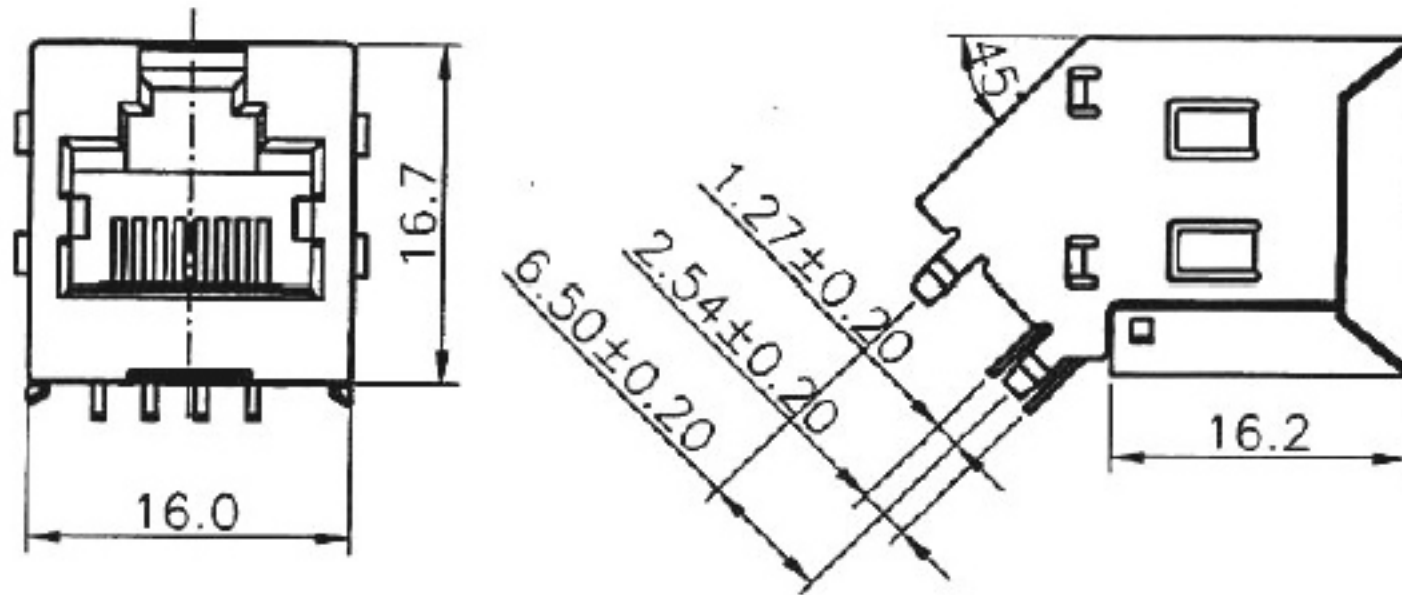


Housing : Standard Material
 Glass Filled Polyester UL94V-0
 Standard Colour : Black
Contact : 0.35mm Thickness Phosphor
 Bronze Alloy Selective
 Gold Plating Over Nickel Over Tin
Shield : 0.25mm Brass Tin Plated



HOW TO ORDER: MX-2002-[]-[]-[Y]-56-[]

1 2 3 4

- 1- No. Contact (8P4C) (8P6C) (8P8C)
- 2- Contact Plating: ()-Gold 6U" (15)-Gold 15U" (30)-Gold 30U" (50)-Gold 50U"
- 3- Body Option: (Y)-With Fully Shielded
- 4- (R)-RoHS Compliant

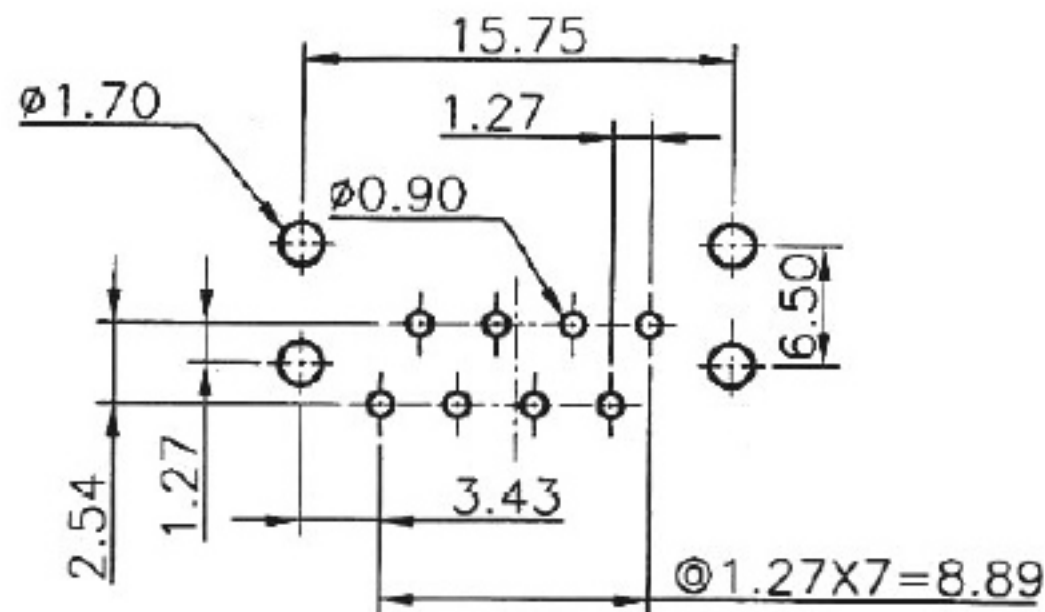

PC Board Layout

|  MATRIX Tecnologia Ind. e Com. Ltda. | | | |
|--|-------|---|---------------------|
| UNIT mm | SCALE | TITLE | DATE September 2007 |
| TOLERANCE: ±0.25 | | Fully Shielded 45° Entry P.C.B. Jack | APP. BY |
|  | | MATL | CHK. BY |
| DWG. NO. | | | DR. BY Diego |