
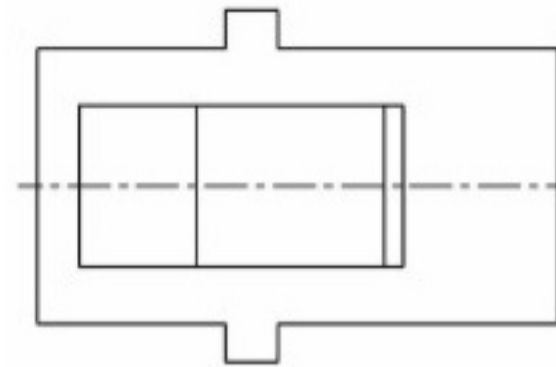
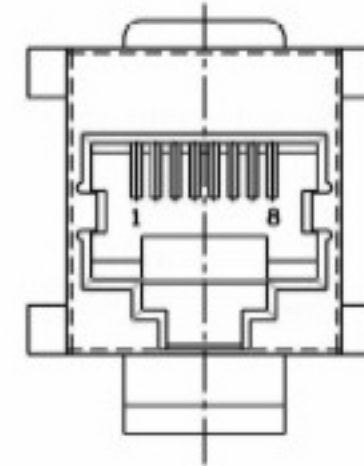
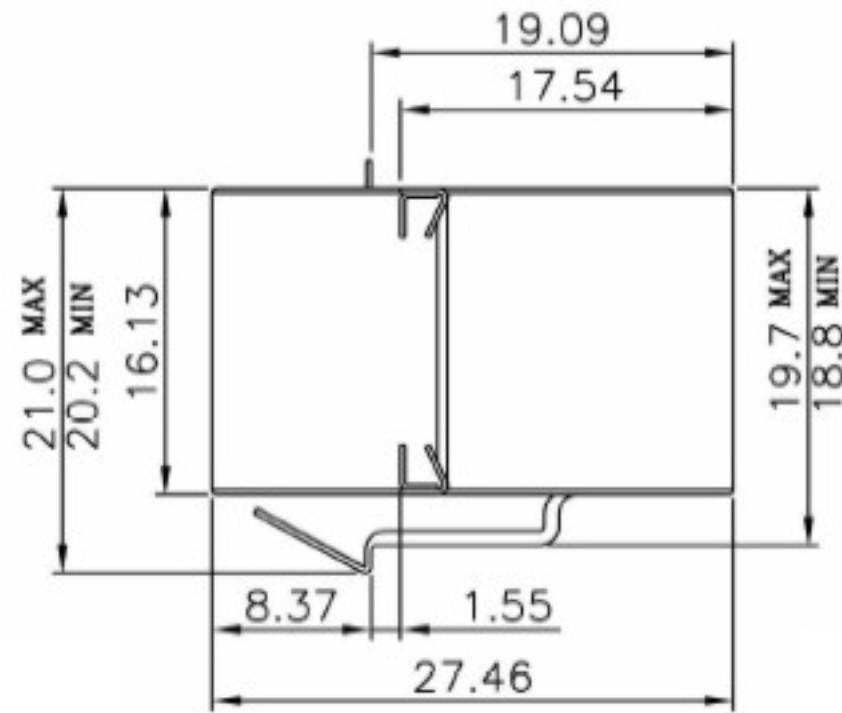


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

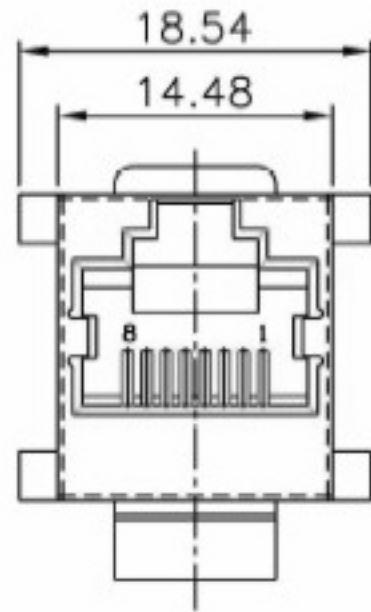

HOW TO ORDER: MX-2002-[]-[]-[Y]-75-[]

1 2 3 4

- 1- No. Contact
(6P2C)
(6P4C)
(6P6C)
(8P2C)
(8P6C)
(8P8C)
(10P2C)
(10P4C)
(10P6C)
(10P8C)
(10P10C)
- 2- Contact Plating:
()-Gold 6U"
(15)-Gold 15U"
(30)-Gold 30U"
(50)-Gold 50U"
- 3- Body Option:
(Y)-With Fully Shielded
- 4- (R)-RoHS Compliant

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE JACK SHIELDED IN LINE COUPLE JACK	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO