


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

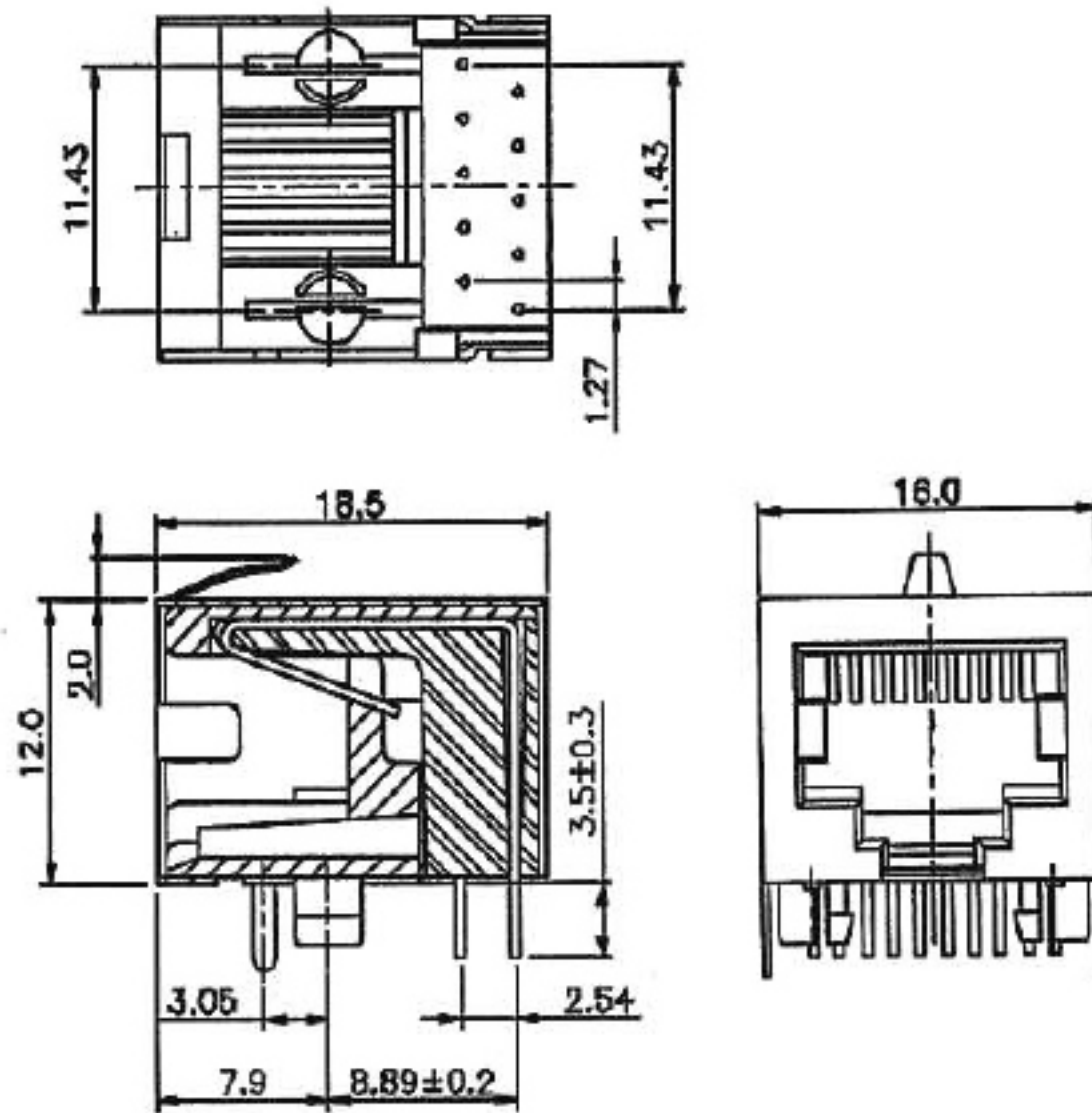


**ELECTRICAL:**



VOLTAGE RATING : 125 VAC RMS.  
 CURRENT RATING : 1.5 AMP.  
 CONTACT RESISTANCE : 30 MΩ MAX.  
 INSULATION RESISTANCE: 1000 MΩ MIN @ 500 VDC.  
 DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**HOW TO ORDER:  
 MX-2002-[ ]-[ ]-[Y]-[ ]-62-[ ]**

**1 2 3 4 5**

- |  |   |   |
|--|---|---|
| 1- No. Contact<br>(10P2C)<br>(10P4C)<br>(10P6C)<br>(10P8C)<br>(10P10C) | 2- Contact Plating:<br>( )-Gold 6U"<br>(15)-Gold 15U"<br>(30)-Gold 30U"<br>(50)-Gold 50U" | 4- Gang Option:<br>( )-1 Jack<br>(2)-2 Jacks<br>(4)-4 Jacks<br>(6)-6 Jacks<br>(8)-8 Jacks |
|  | 3- Body Option:<br>(N)-W/O Shielded<br>(Y)-With Fully Shielded                            | 5- (R)-RoHS Compliant   |

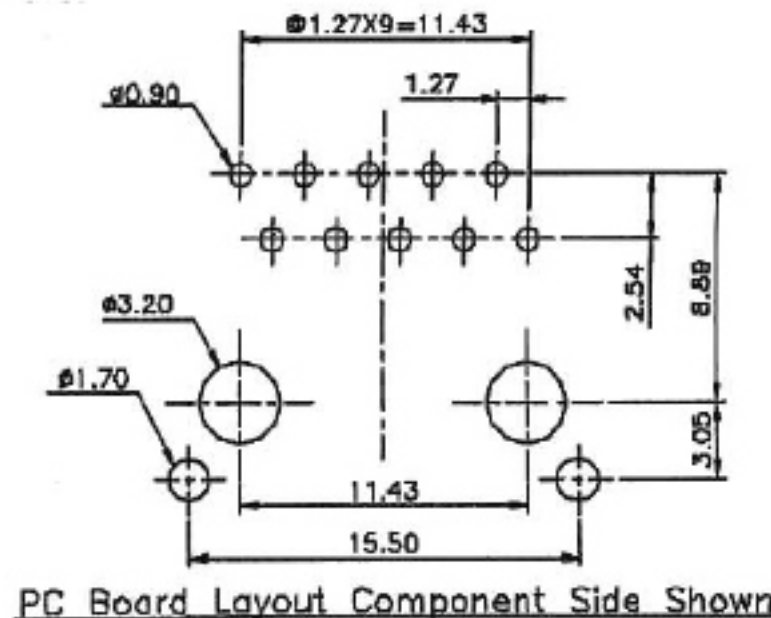

 <b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>			
UNIT mm	SCALE	TITLE	DATE SEPTEMBER 2007
TOLERANCE: ±0.25		SIDE ENTRY P.C.B JACK (10P) FULLYSHIELDED	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO