
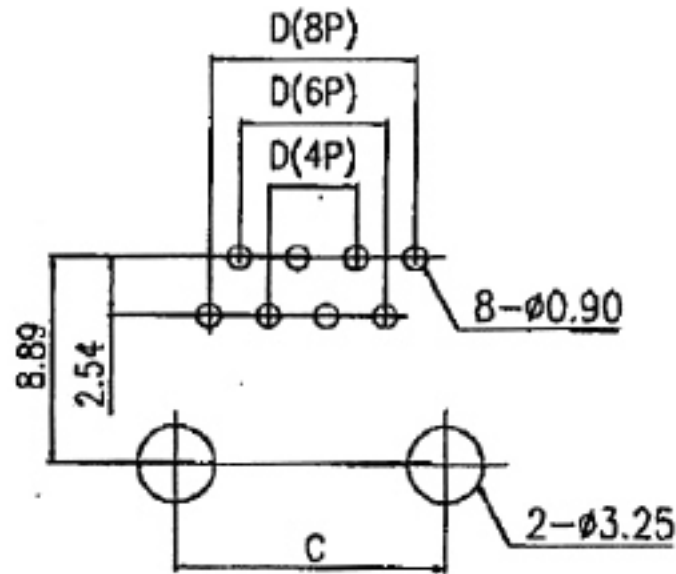
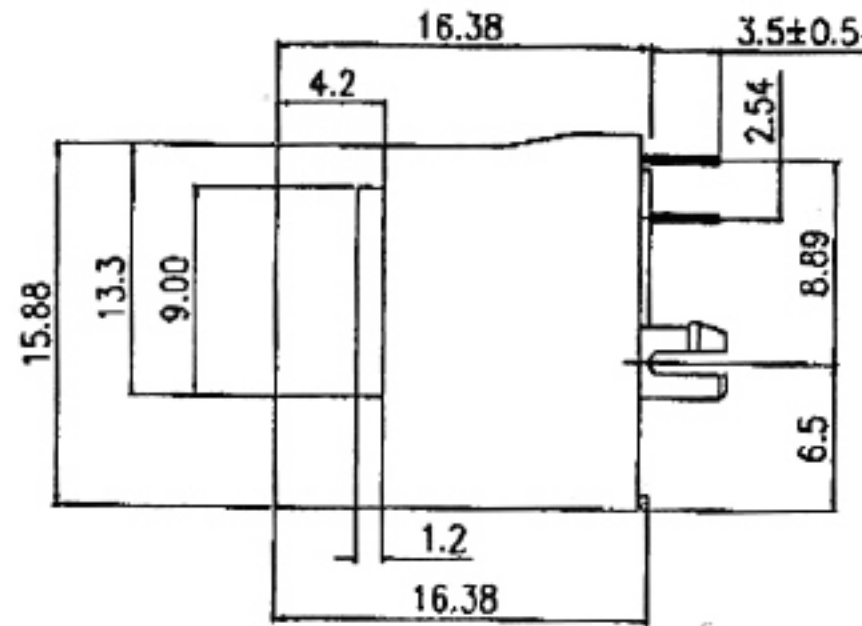
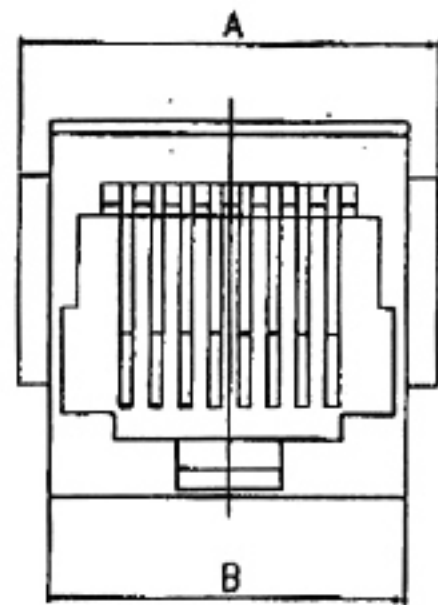


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

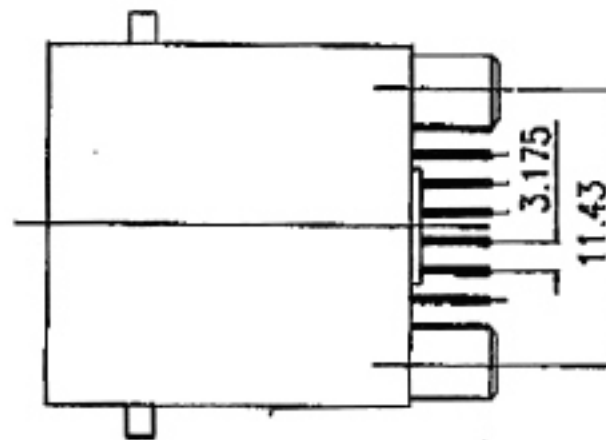

PCB Layout


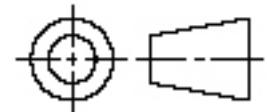


HOW TO ORDER: MX-2002-[]-[]-[A]-[S]-52-[]

1 2 3 4 5

- | | | |
|---|--|---|
| <p>1- No. Contact
(4P2C)
(4P4C)
(6P2C)
(6P4C)
(6P6C)
(8P8C)</p> | <p>2- Contact Plating:
()-Gold 6U"
(15)-Gold 15U"
(30)-Gold 30U"
(50)-Gold 50U"</p> | <p>4- Foot Type:
(H)-Half Round Foot
(S)-Split Foot
5- (R)-RoHS Compliant</p> |
| <p>3- Body Option:
(A)-With Panel Stop (Unshielded)
(B)-W/O Panel Stop (Unshielded)
(D)-W/O Panel Stop (Shielded)</p> | | |

No. of Positions	Dimensions			
	A	B	C	D
4	13.97	11.43	7.62	3.81
6	15.90	13.46	10.16	6.35
8	17.84	15.36	11.43	8.89

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE Top Entry PCB Jack "F" Type	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Dino