
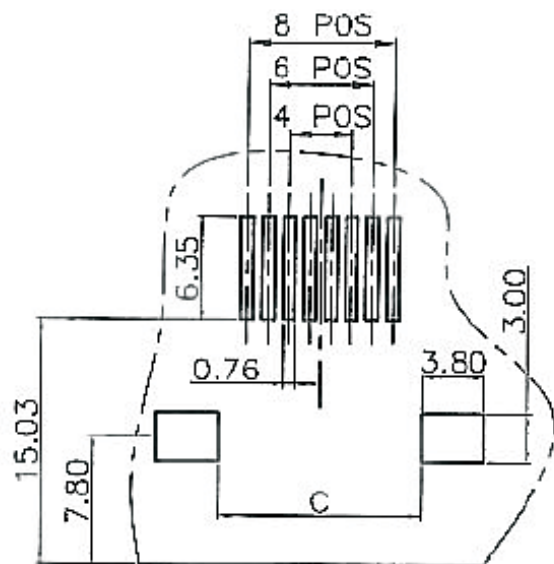
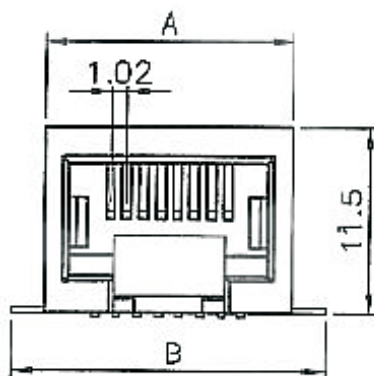


No. of Positions	Dimensions			
	A	B	C	D
4	11.2	14.8	8.20	3.81
6	13.2	16.95	10.35	6.35
8	15.1	18.98	12.38	8.89

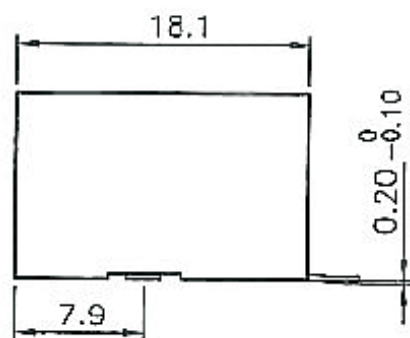

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

HOW TO ORDER:
2002[][][O]D58R
1 2 3

- | | |
|--|---|
| 1- No. Contact
(4P2C)
(4P4C)
(6P2C)
(6P4C)
(6P6C)
(8P2C)
(8P4C)
(8P6C)
(8P8C) | 2- Contact Plating:
()-Gold 6U"
(15)-Gold 15U"
(30)-Gold 30U"
(50)-Gold 50U" |
| | 3- Foot Type:
(S)-Split Foot
(O)-Outward Metal Foot |

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE Side Entry LP P.C.B Jack SMT Type	DATE DECEMBER 2009
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Felipe