

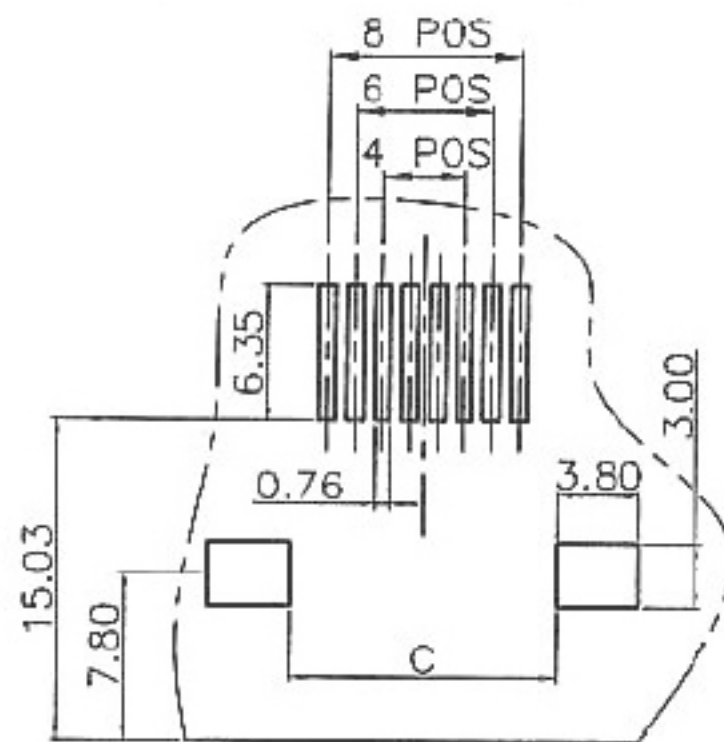


No. Of Positions	Dimensions			
	A	B	C	D
4	11.2	14.8	8.20	3.81
6	13.2	16.95	10.35	6.35
8	15.1	18.98	12.38	8.89

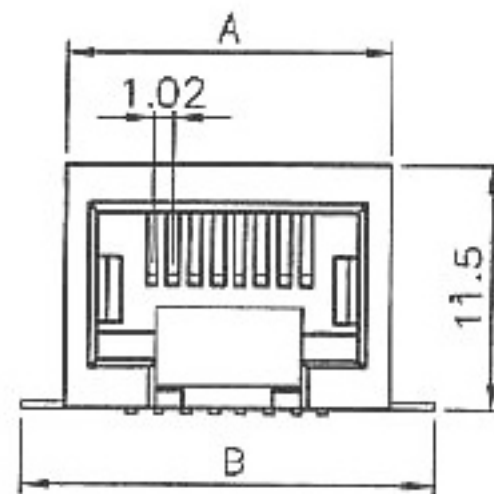


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

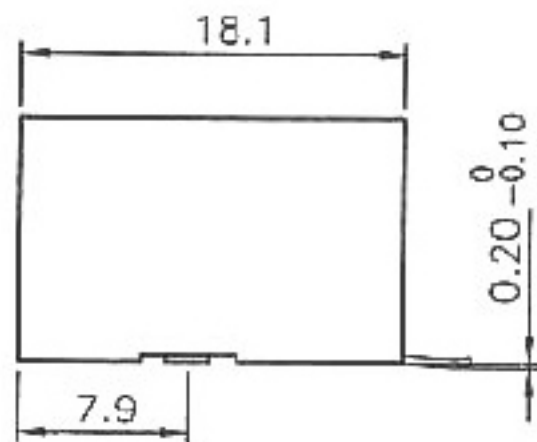

HOW TO ORDER: MX-2002-[]-[]-[O]-SMD-58-[]

1 2 3 4

- | | |
|----------------|------------------------|
| 1- No. Contact | 2- Contact Plating: |
| (4P2C) | ()-Gold 6U" |
| (4P4C) | (15)-Gold 15U" |
| (6P2C) | (30)-Gold 30U" |
| (6P4C) | (50)-Gold 50U" |
| (6P6C) | 3- Foot Type: |
| (8P2C) | (S)-Split Foot |
| (8P4C) | (O)-Outward Metal Foot |
| (8P6C) | 4- (R)-RoHS Compliant |
| (8P8C) | |

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE	DATE September 2007
TOLERANCE: ±0.25		Side Entry LP P.C.B Jack SMT Type	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego