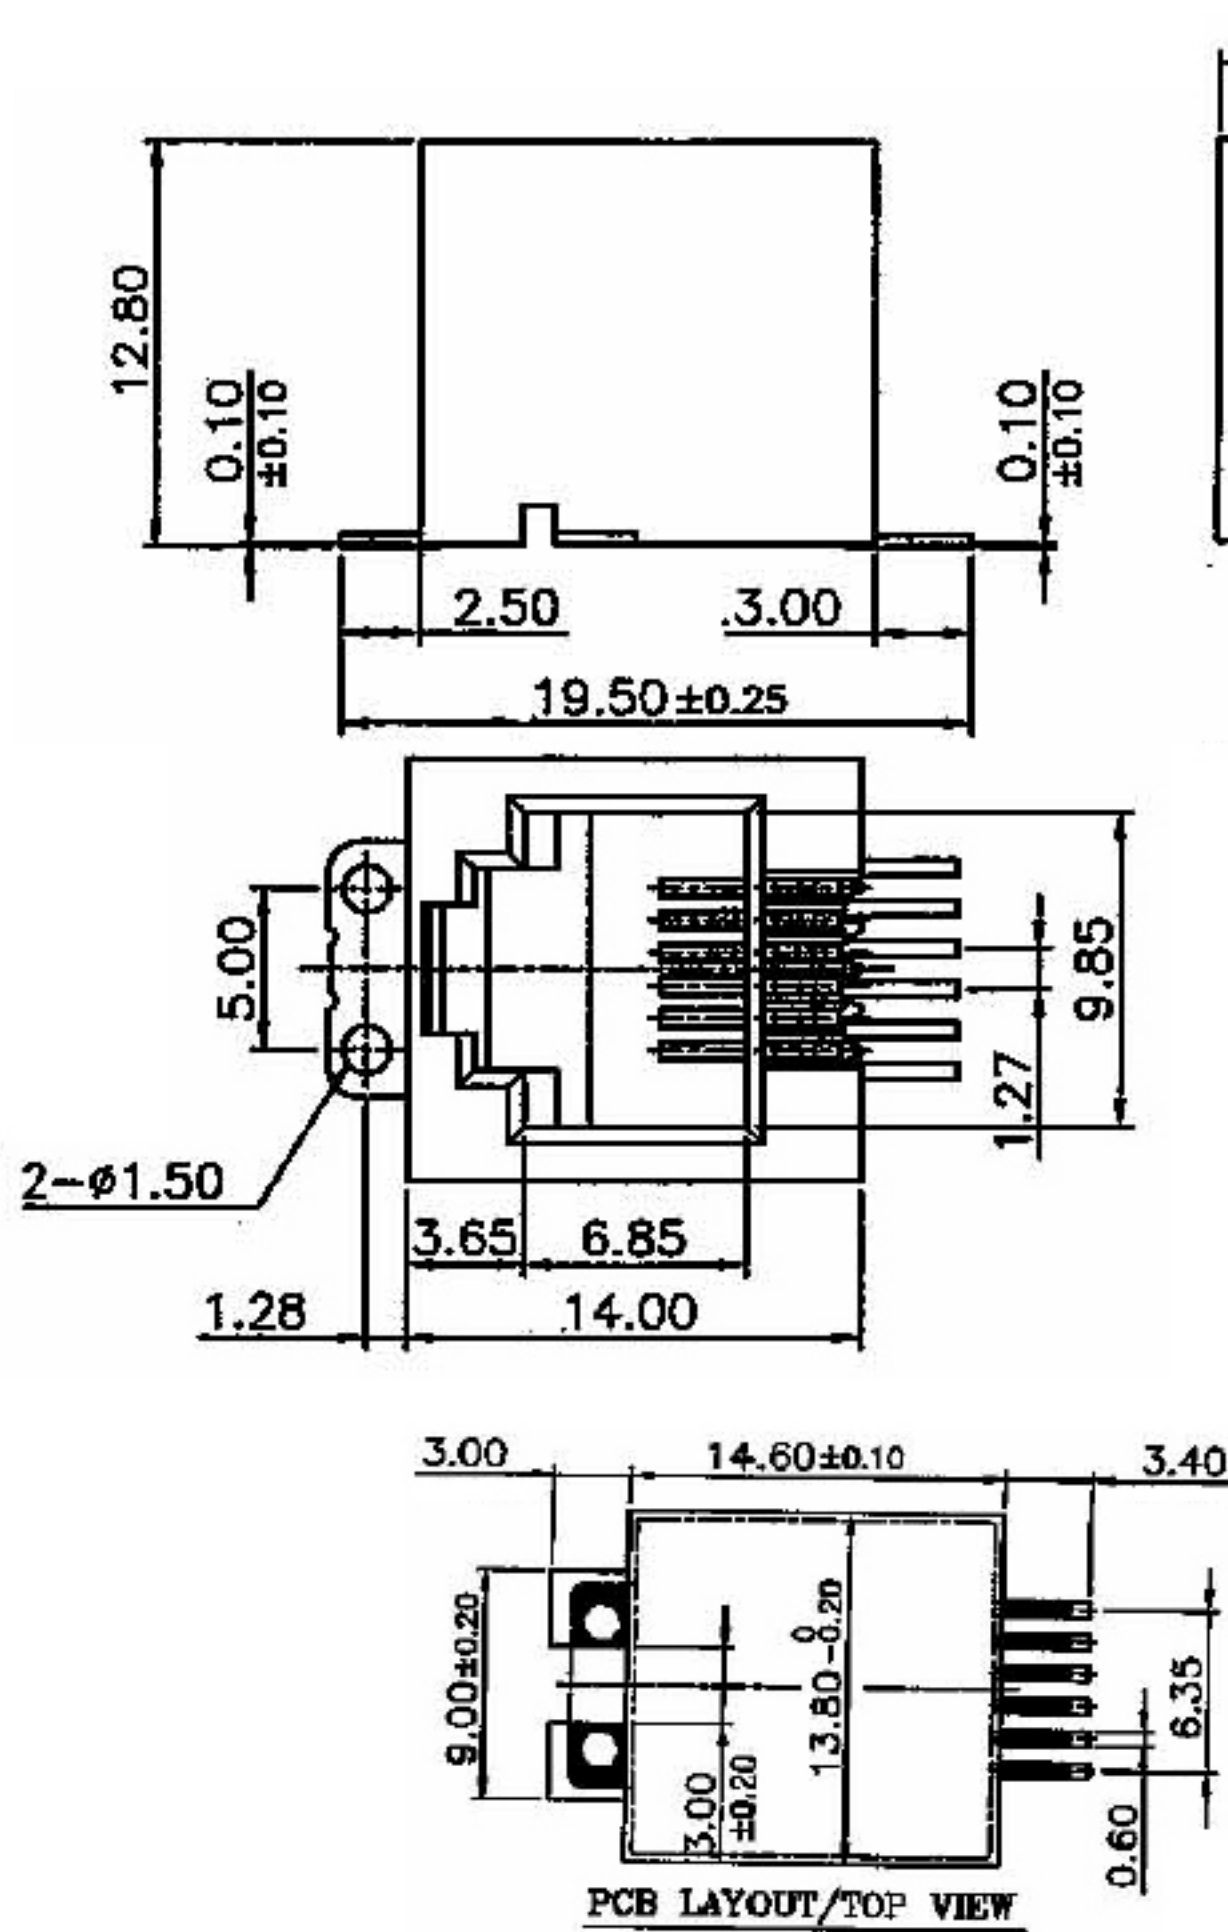




REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		



HOW TO ORDER: MX-2002-[]-[]-[D]-SMD-53-[]

- | | | | |
|--|---|---|-----------------------|
| 1 | 2 | 3 | 4 |
| 1- No. Contact
(4P2C)
(4P4C)
(6P2C)
(6P4C)
(6P6C)
(8P2C)
(8P4C)
(8P6C)
(8P8C) | 2- Contact Plating:
()-Gold 6U"
(15)-Gold 15U"
(30)-Gold 30U"
(50)-Gold 50U" | 3- Body Option:
(D)-Bracket W/2 Holes
(T)-Bracket W/3 Holes | 5- (R)-RoHS Compliant |

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE Top Entry P.C.B. Jack SMT Type	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego