


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

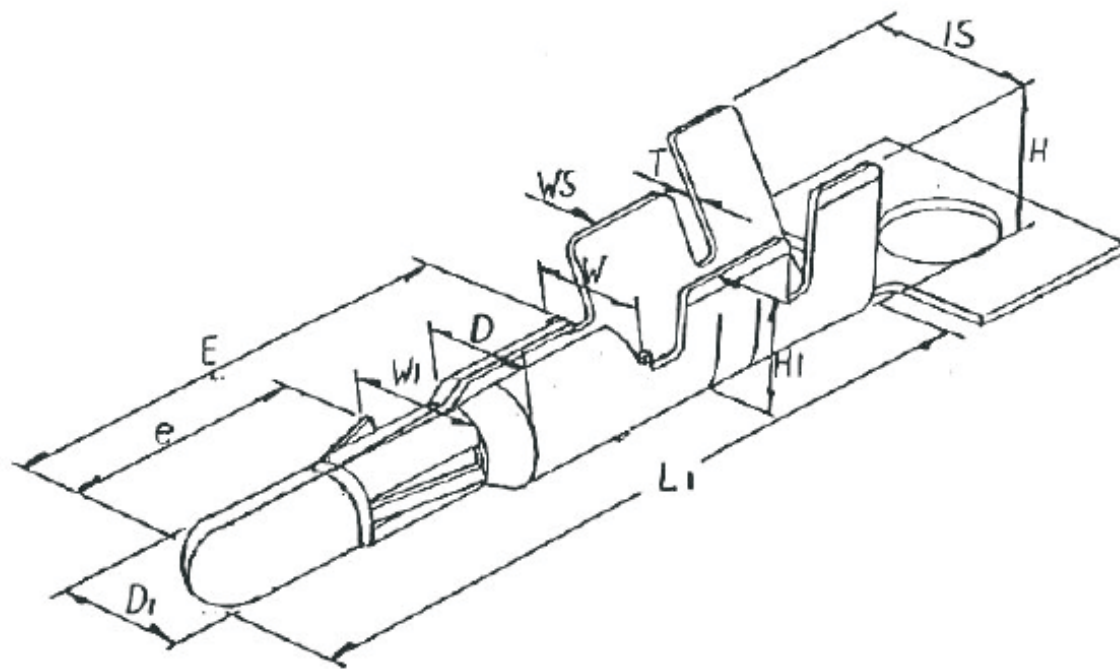

SPECIFICATION



Current Rating: 8A AC, DC
Voltage Rating: 250V AC, DC
Temperature Range:
-25°C ~ +85°C
Contact Resistance: 10m Max.
Insulation Resistance:
1,000M Min.
Withstand Voltage: 1,000M Min.

HOW TO ORDER: 2020TM[][]R 1 2

- 1- Terminal Plating
()-Tin
(D)-Gold Flash
(C)-Selective Gold
2- Wire Option
(A)-16~18AWG
(D)-18~22AWG
(E)-18~24AWG

DIMENSION: (MM)

T: 0.25±0.03	WS: 3.3±0.35
L1: 20.5±0.35	H: 4.9±0.25
E: 12.7±0.25	H1: 3.6±0.25
W: 4.0±0.25	D1: 2.0 ±0.06
W1: 4.4±0.25	e: 8.7±0.25
IS: 5.0±0.35	D: 3.1 ^{+0.05} _{-0.2}

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE	TITLE 7,0mm TERMINAL MALE	DATE MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE