


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

SPECIFICATION

Current Rating: 2A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25°C to 85°C
 Contact Resistance: 20 m ohms Max.
 Insulation Resistance: 1,000M ohms Min.
 Withstanding Voltage: 1,500V AC/minute.
 Material: Nylon 66, UL94V-2

Poles	Dimension	
	A	B
2	2.54	5.64
3	5.08	8.16
4	7.62	10.72
5	10.16	13.30
6	12.70	15.78
7	15.24	18.40
8	17.78	20.80
9	20.32	23.50
10	22.86	26.00
11	25.40	28.50
12	27.94	31.00
13	30.48	33.50
14	33.02	36.00
15	35.56	38.50
16	38.10	41.20
17	40.64	43.60
18	43.18	46.32
19	45.72	48.80
20	48.26	51.34

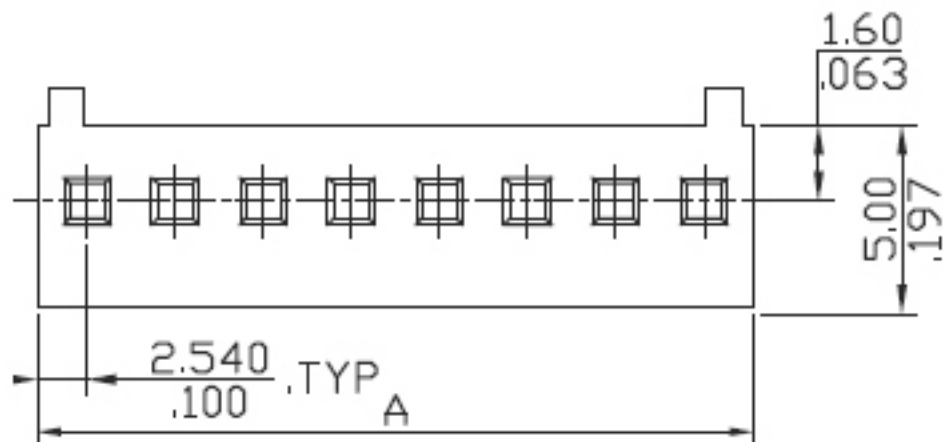

**HOW TO ORDER:
 MX-8002-[]P-[]**

1 2
 1- Nr. of Positions
 02 to 20
 2- (R) RoHS Compliant

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE	DATE SEPTEMBER 2007
TOLERANCE: ±0.25		2.54mm HOUSING	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO