


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

SPECIFICATION

Current Rating: 2A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25°C to 85°C
 Contact Resistance: 20 m ohms Max.
 Insulation Resistance: 1,000M ohms Min.
 Withstanding Voltage: 1,500V AC/minute.
 Material: Nylon 66, UL94V-2

Poles	Dimension	
	A	B
2	2.54	5.64
3	5.08	8.16
4	7.62	10.72
5	10.16	13.30
6	12.70	15.78
7	15.24	18.40
8	17.78	20.80
9	20.32	23.50
10	22.86	26.00
11	25.40	28.50
12	27.94	31.00
13	30.48	33.50
14	33.02	36.00
15	35.56	38.50
16	38.10	41.20
17	40.64	43.60
18	43.18	46.32
19	45.72	48.80
20	48.26	51.34

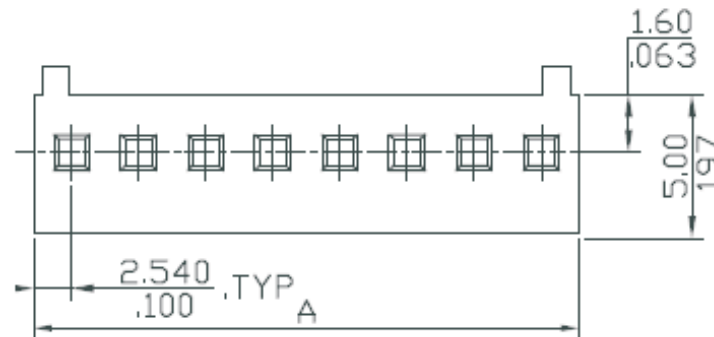

HOW TO ORDER: 6002H[]R

1

1- Nr. of Positions
02 to 20

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE 2.54mm HOUSING	DATE MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE