
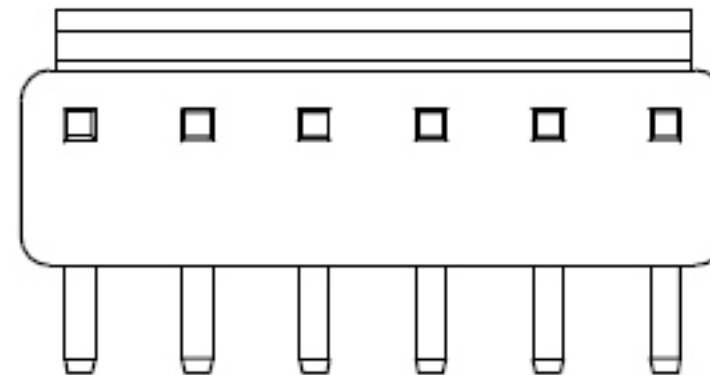


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

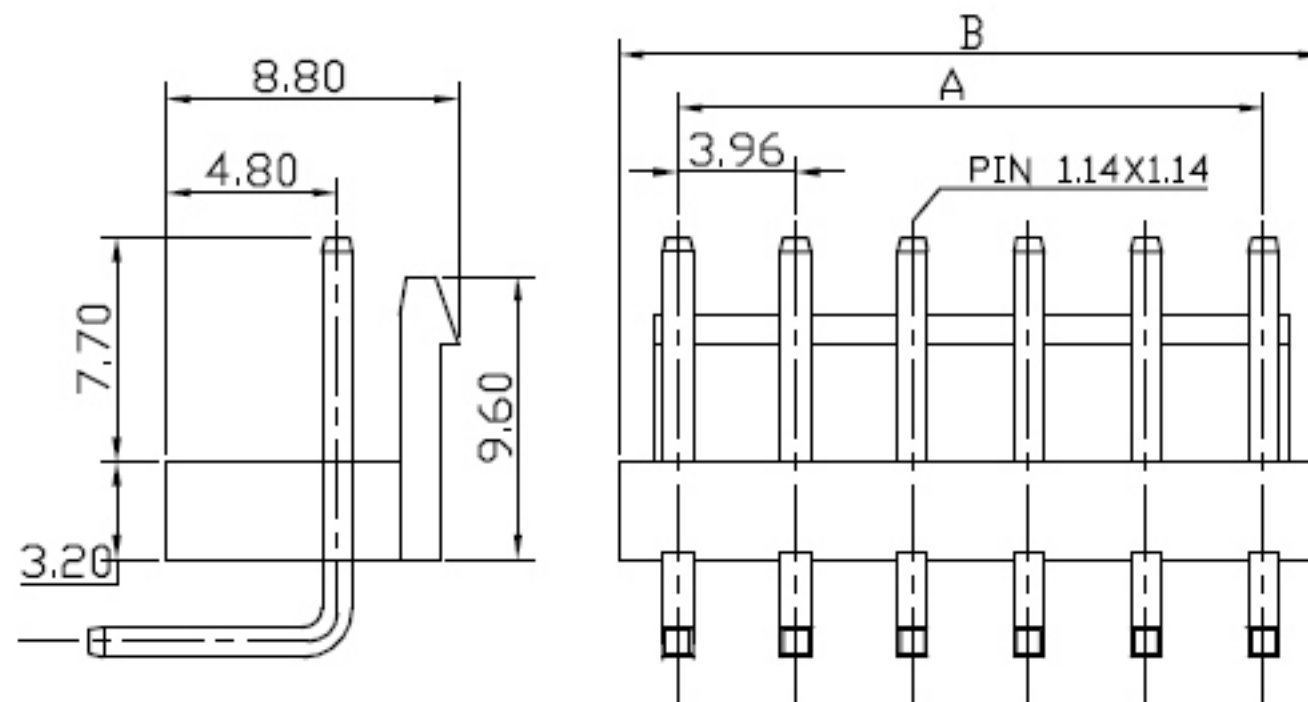

SPECIFICATION

Voltage Rating: 250V AC/DC

Current Rating: 5A AC/DC

Temperature Range: -25 ° C ~+85 ° C

Contact Resistance: 20 Milliohms Max.

Insulation Resistance: 1,000 Megohms Min.

Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.

Material: Nylon 66, UL94V-0


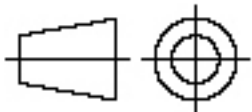
Color: White

Pin: Brass, Tin Plated

Poles	Dimension In. (mm)	
	A	B
2	3.96	7.92
3	7.92	11.92
4	11.88	15.84
5	15.84	19.84
6	19.80	23.80
7	23.76	27.88
8	27.72	31.74
9	31.68	35.86
10	35.64	39.90
11	39.60	43.84
12	43.56	47.92
13	47.52	51.72
14	51.48	55.92

HOW TO ORDER:
MX-3966-W-[90]-[]P-[]
1 2 3

- 1- Function
(90)- 90°
(180)-180°
- 2- N° of Contact
2 to 14
- 3- (R) RoHS Compliant

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE	TITLE	DATE SEPTEMBER 2007
TOLERANCE: ±0.25		3,96mm WAFER 90°	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO