
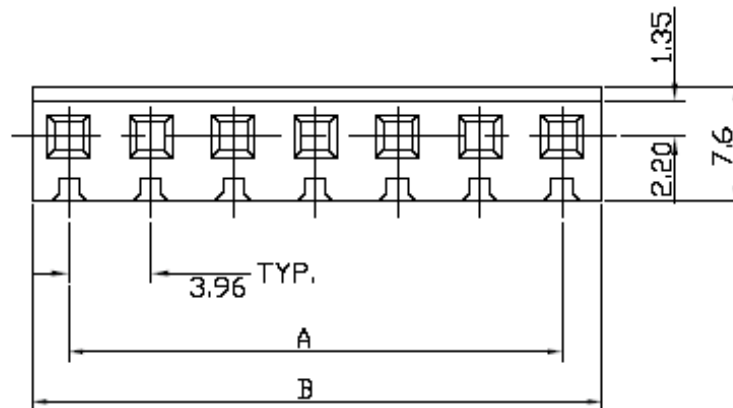
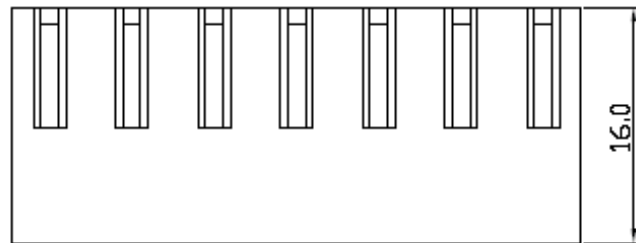


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		
C	CÓD ANT.: 3960HxxR		11/2011



SPECIFICATION

Voltage Rating: 250V AC/DC
 Current Rating: 5A AC/DC
 Temperature Range: -25 ° C +85 ° C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1,000 Megohms Min.
 Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.
 Material: Nylon 66, UL94V-2
 Color: White


HOW TO ORDER:

3960 [H] [] [] [R]

Series Nr. 3960 **2 - Nr. of Ways:** 02 to 16 **4 - (R) RoHS Compliant**

1 - Product: (H) - Housing
3 - Body Option: (L) - W/ Locking Rib, (N) - W/ O Locking Rib

Poles	Dimension		Poles	Dimension	
	A	B		A	B
2	3.96	8.45	11	39.60	43.95
3	7.92	12.48	12	43.56	47.90
4	11.88	16.44	13	47.52	52.16
5	15.84	20.21	14	51.48	56.23
6	19.80	24.22	15	55.44	59.70
7	23.76	28.30	16	59.40	63.70
8	27.72	32.32	17	63.36	67.60
9	31.86	36.22	18	67.32	71.60
10	35.64	40.36	19	71.28	75.50
			20	75.24	79.50

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE	TITLE 3,96mm HOUSING	DATE MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE