
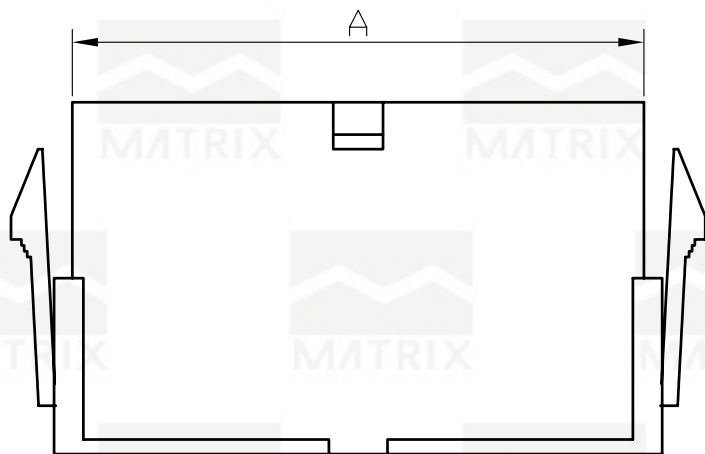
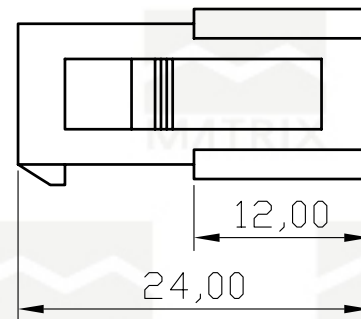


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

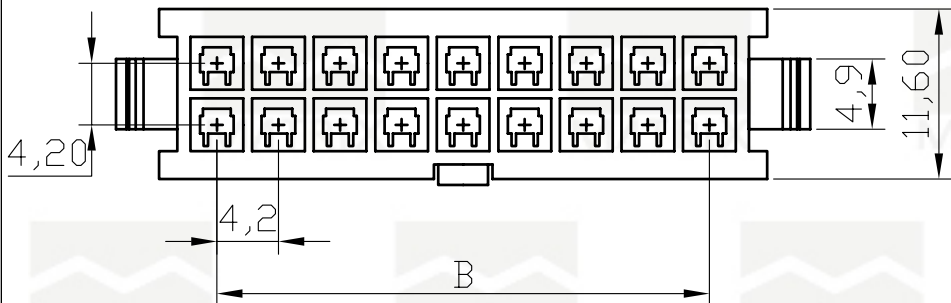

HOW TO ORDER:
MX-4200-H-M-[]P-[]-[]

1 2 3

- 1- N° of Contacts:
2 to 24
- 2- Material:
()-Nylon 66 UL 94V-2
(1)-Nylon 66 UL 94V-0
- 3- (R)RoHS Compliant

Circuits	Dim.B	Dim.A	Circuits	Dim.B	Dim.A	Circuits	Dim.B	Dim.A
2		5.6	10	16.8	22.4	18	33.6	39.2
4	4.2	9.8	12	21.0	26.6	20	37.8	43.4
6	8.4	14.0	14	25.2	30.8	22	42.0	47.6
8	12.6	18.2	16	29.4	35.0	24	46.2	51.8



MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm SCALE 2:1

TITLE
4,2mm HOUSING MALE
DUAL ROW

DATE SEPTEMBER 2007

TOLERANCE: ±0.25

APP. BY



MATL

CHK. BY

DWG. NO.

DR. BY DINO