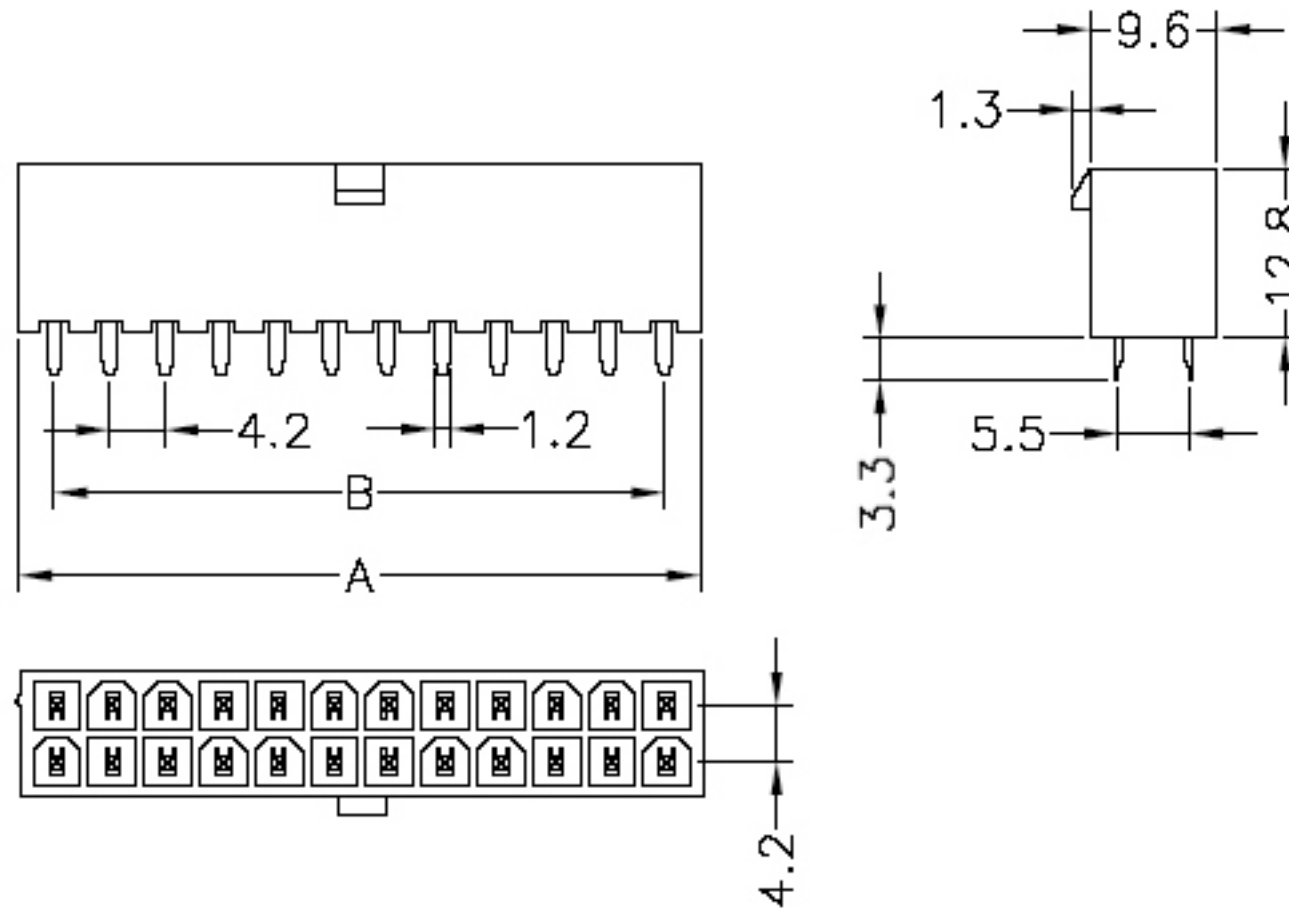


| REV | ECN. NO.       | APP | DATE |
|-----|----------------|-----|------|
| A   | EDIÇÃO INICIAL |     |      |
|     |                |     |      |
|     |                |     |      |
|     |                |     |      |


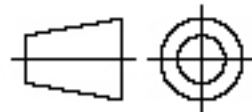


## HOW TO ORDER: MX-4200-W-[180]-[ ]-[ ]P-[ ]-[ ]

**1    2    3    4    5**

- |   |   |
|---|---|
| 1- Function<br>(90)-90°<br>(180)-180°   | 3- N° of Contacts<br>2 to 24  |
| 2- Body Option<br>( )-W/O Mounting Ears and Polarizing Pegs<br>(P)-With Polarizing Pegs<br>(E)-With Mounting Ears<br>(W)-With Mounting Ears and Polarizing Pegs | 4- Terminal Plating<br>( )-Tin<br>(G)-Gold Flash<br>(C)-Selective Gold<br>5- (R) RoHS Compliant |

| Circuits | Dim.B | Dim.A | Circuits | Dim.B | Dim.A | Circuits | Dim.B | Dim.A |
|----------|-------|-------|----------|-------|-------|----------|-------|-------|
| 2        |       | 5.2   | 10       | 16.8  | 22.0  | 18       | 33.6  | 38.8  |
| 4        | 4.2   | 9.4   | 12       | 21.0  | 26.2  | 20       | 37.8  | 43.0  |
| 6        | 8.4   | 13.6  | 14       | 25.2  | 30.4  | 22       | 42.0  | 47.2  |
| 8        | 12.6  | 17.8  | 16       | 29.4  | 34.6  | 24       | 46.2  | 51.4  |

|  <b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b> |       |                           |                        |
|--|-------|---------------------------|------------------------|
| UNIT<br>mm   | SCALE | TITLE<br>4,2mm WAFER 180° | DATE<br>SEPTEMBER 2007 |
| TOLERANCE: ±0.25   |       |                           | APP. BY                |
|   |       | MATL                      | CHK. BY                |
|  |       | DWG. NO.                  | DR. BY DINO            |