




REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

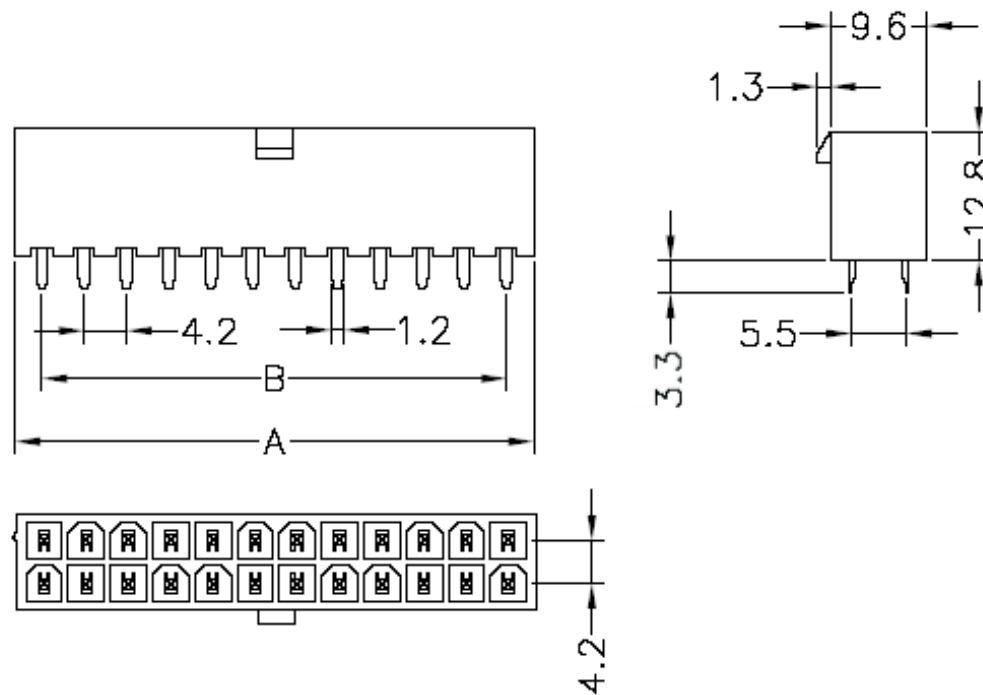

## HOW TO ORDER: 4200W[S][ ][ ][ ]R 1 2 3 4

- 1- Function  
(R)-90°  
(S)-180°
- 2- Body Option  
( )-W/O Mounting Ears and Polarizing Pegs  
(P)-With Polarizing Pegs  
(E)-With Mounting Ears  
(W)-With Mounting Ears and Polarizing Pegs
- 3- N° of Contacts  
2 to 24
- 4- Terminal Plating  
( )-Tin  
(G)-Gold Flash  
(C)-Selective Gold

Circuits	Dim.B	Dim.A	Circuits	Dim.B	Dim.A	Circuits	Dim.B	Dim.A
2		5.2	10	16.8	22.0	18	33.6	38.8
4	4.2	9.4	12	21.0	26.2	20	37.8	43.0
6	8.4	13.6	14	25.2	30.4	22	42.0	47.2
8	12.6	17.8	16	29.4	34.6	24	46.2	51.4

 <b>MATRIX</b>		<b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>	
UNIT mm	SCALE	TITLE 4,2mm WAFER 180°	DATE MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE