


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

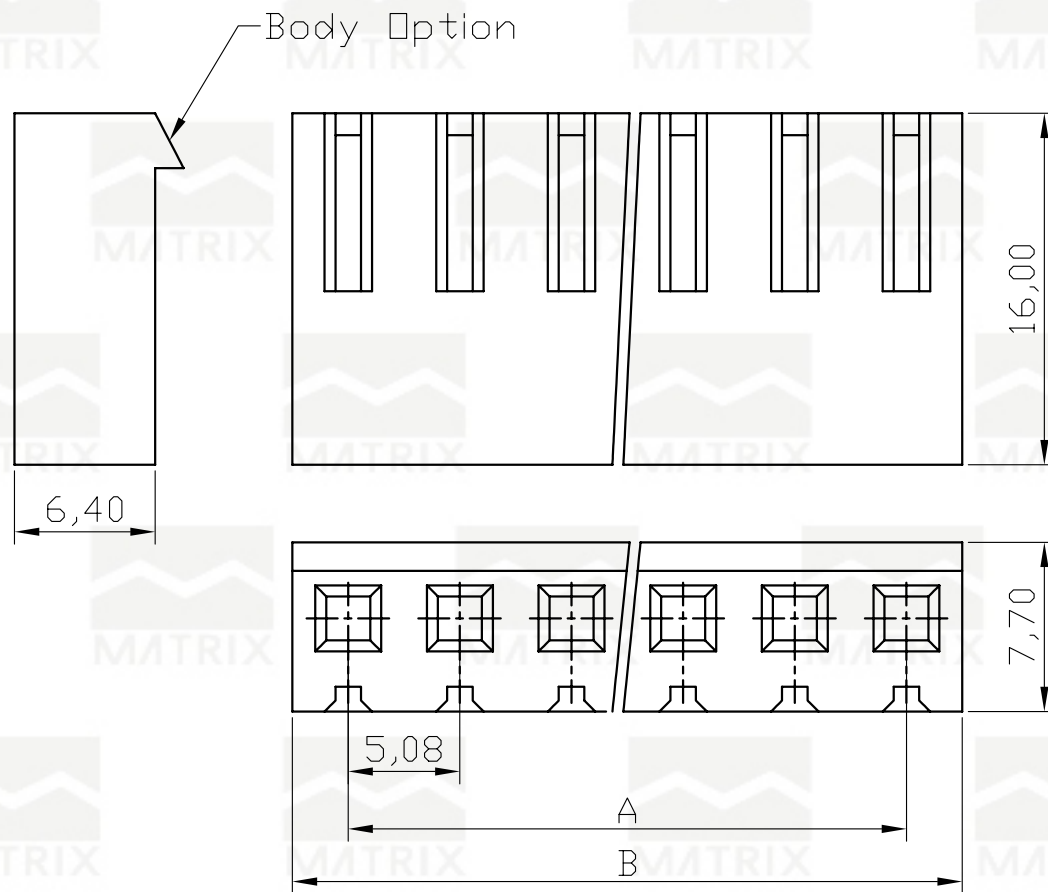


SPECIFICATION
Voltage Rating: 250V AC/DC
Current Rating: 5A AC/DC
Temperature Range: -25 ° C ~+85° C
Contact Resistance: 10 Milliohms Max.
Insulation Resistance: 1000 Megohms Min.
Dielectric Withstanding Voltage: 1500V AC/DC/Minute.
Material: Nylon 66, UL94V-2
Color: White

Dimension		
Poles	A	B
2	5,08	10,16
3	10,16	15,24
4	15,24	20,32
5	20,32	25,40
6	25,40	30,44
7	30,44	35,48
8	35,48	40,56
9	40,56	45,64
10	45,64	50,72

HOW TO ORDER:
MX-5080-H-[]P-[]-[]
1 2 3

- 1- N° of Contact
2 to 10
- 2- Body Option:
()-With Locking Rib
(N)-Whitout Locking Rib
- 3- (R) RoHS Compliant

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT	mm	SCALE	TITLE
TOLERANCE: ±0.25			DATE OCTOBER 2007
			APP. BY
			CHK. BY
			DR. BY DINO

