


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

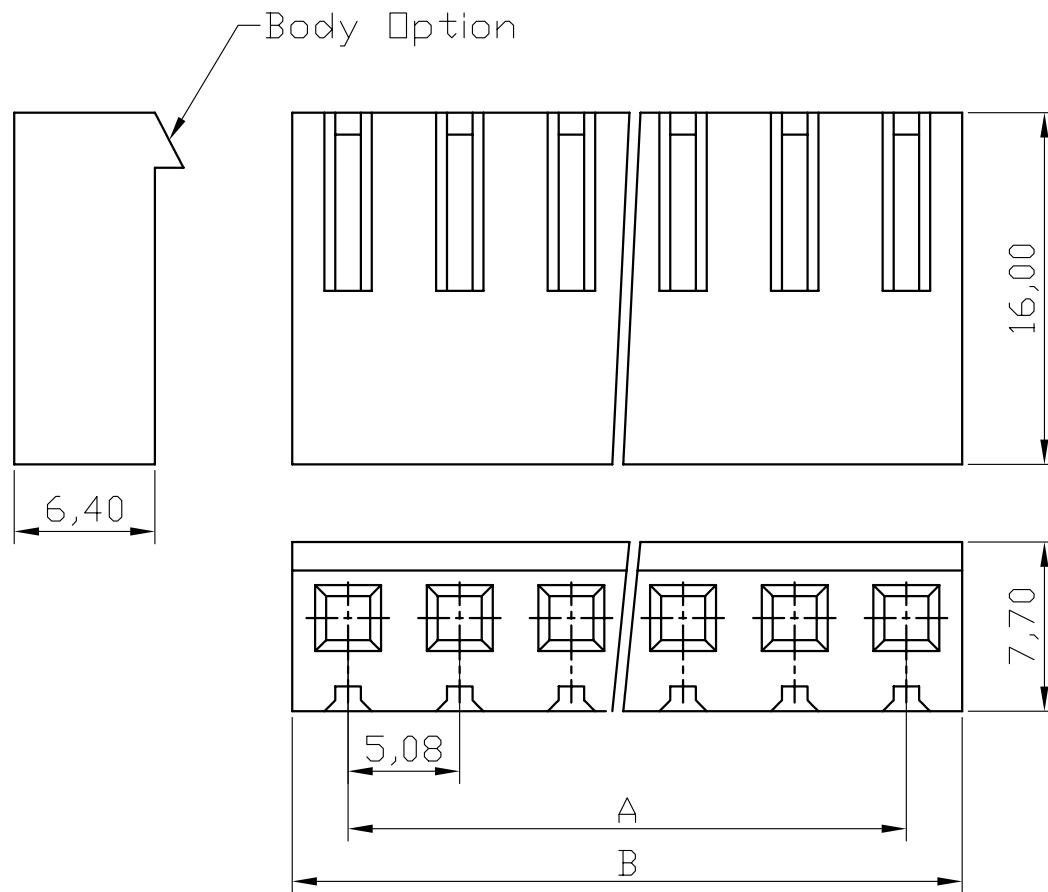

SPECIFICATION

Voltage Rating: 250V AC/DC
 Current Rating: 5A AC/DC
 Temperature Range: -25 ° C ~+85° C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Dielectric Withstanding Voltage: 1500V AC/DC/Minute.
 Material: Nylon 66, UL94V-2
 Color: White

HOW TO ORDER:

5080H[][]R

1 2

- 1- N° of Contact
2 to 10
- 2- Body Option:
()-Whith Locking Rib
(N)-Whitout Locking Rib

Dimension		
Poles	A	B
2	5,08	10,16
3	10,16	15,24
4	15,24	20,32
5	20,32	25,40
6	25,40	30,44
7	30,44	35,48
8	35,48	40,56
9	40,56	45,64
10	45,64	50,72



MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE	TITLE 5,08mm HOUSING	DATE MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE