



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

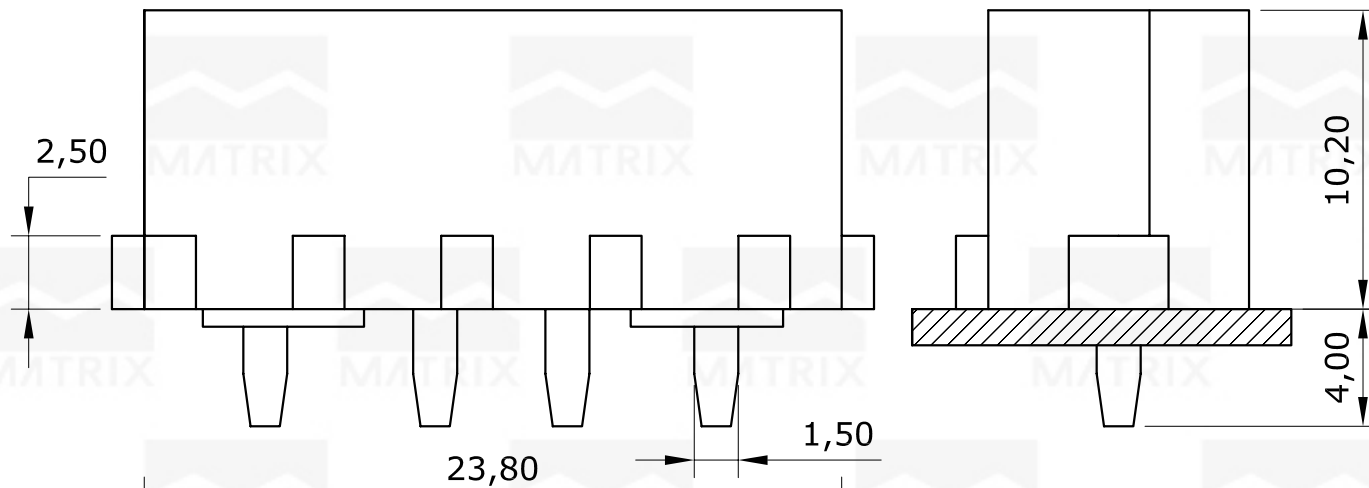

### SPECIFICATION

Current Rating: 5A AC, DC  
 Voltage Rating: 250V AC, DC  
 Temperature Range: -25°C +105°C  
 Insulation Resistance: 1,000M  $\Omega$  Min  
 Withstanding Voltage: 1,500V AC/minute  
 Material: Nylon 66, UL94V-2  
 Color: White  
 Pin: Brass, Tin Plated

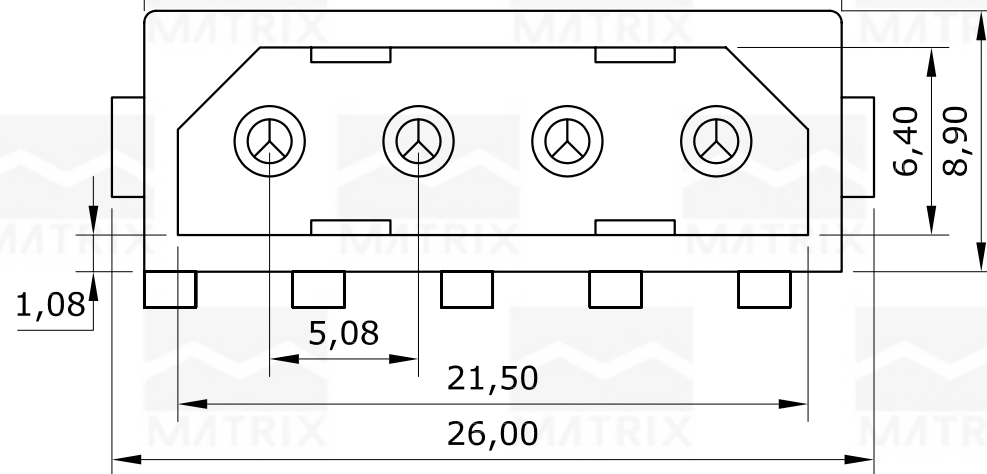


### HOW TO ORDER:



**MX-2430-W180-[04]P-[ ]-[ ]**

**1    2    3**

- 1- N° of Contacts  
02, 03 and 04
- 2- Terminal Plating  
( )-Tin  
(G)-Gold Flash  
(C)-Selective Gold
- 3- (R)-RoHS Compliant

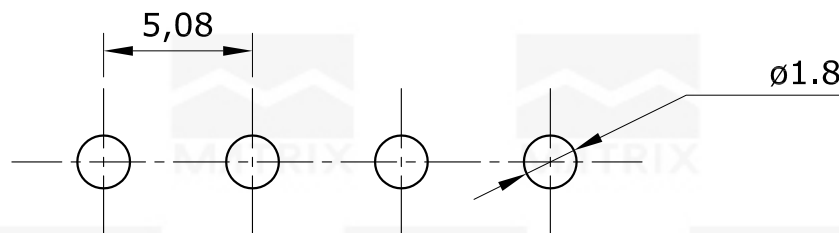

**P.C.B. LAYOUT**

 <b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>			
UNIT mm	SCALE	TITLE 5.08mm WAFER 180°	DATE March 2008
TOLERANCE: $\pm 0.25$			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diogo