


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

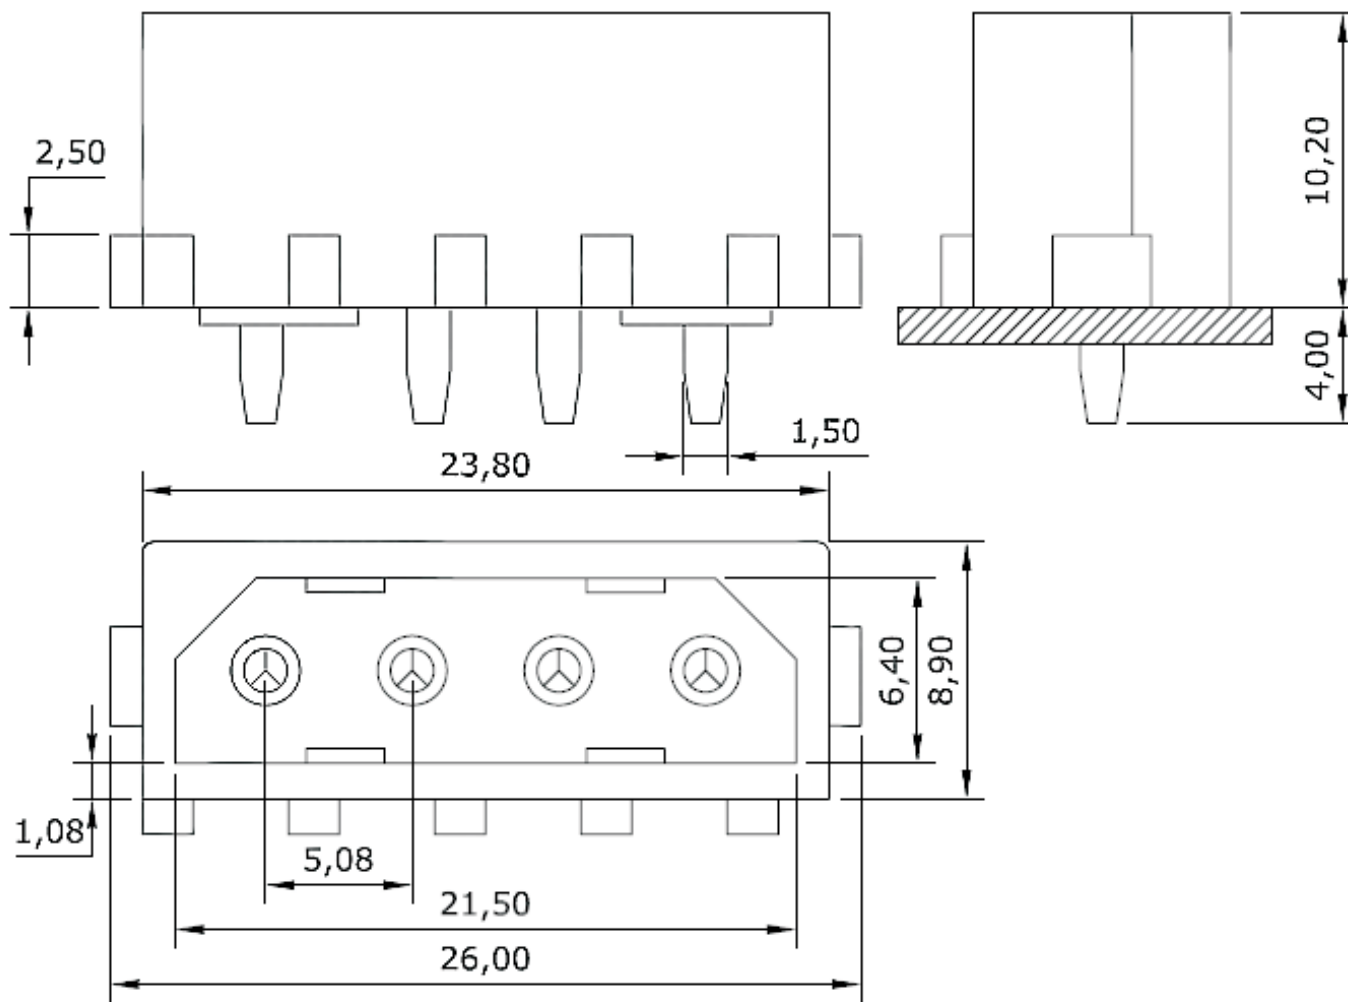


SPECIFICATION



Current Rating: 5A AC, DC
Voltage Rating: 250V AC, DC
Temperature Range: -25°C +105°C
Insulation Resistance: 1,000M Ω Min
Withstanding Voltage: 1,500V AC/minute
Material: Nylon 66, UL94V-2
Color: White
Pin: Brass, Tin Plated

HOW TO ORDER:
2430WS[04][]R
1 2

- 1- Nº of Contacts
02, 03 and 04
- 2- Terminal Plating
()-Tin
(G)-Gold Flash
(C)-Selective Gold

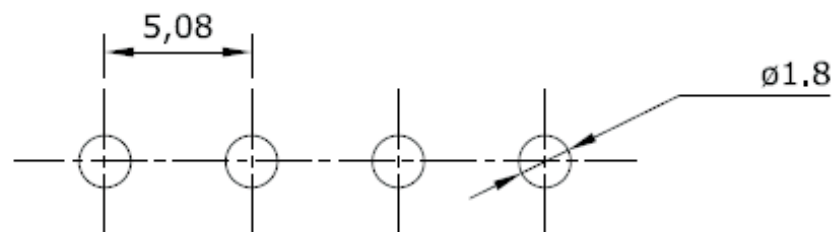

P.C.B. LAYOUT

 MATRIX Tecnologia Ind. e Com. Ltda.		UNIT	SCALE	TITLE	DATE
		mm		5,08mm WAFER 180°	December 2009
		TOLERANCE: ± 0.25			APP. BY
		MATL			CHK. BY
		DWG. NO.			DR. BY Felipe