

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

SPECIFICATION

Current Rating: 13A AC/DC.



Voltage Rating: 650V AC/DC.

Contact Resistance: 5MΩ (Max)


Insulation Resistance: 1000M Ω Min.

Withstand Voltage: 1500V AC / 1 Minute.


Temperature Range: -25 °C to +85 °C

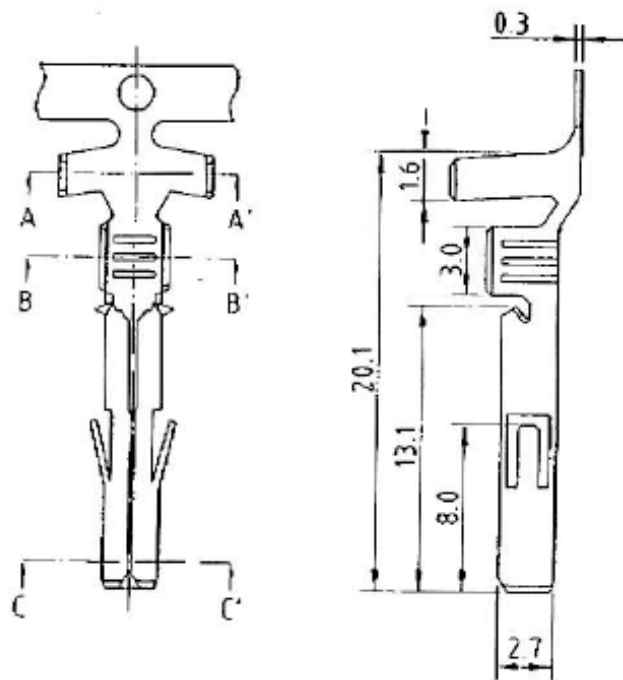

SECTION : A-A'



SECTION : B-B'






SECTION : C-C'

HOW TO ORDER: 6350TF[][]R 1 2

- 1- Terminal Plating
 - ()-Tin
 - (D)-Gold Flash
 - (C)-Selective Gold
- 2- Wire Option
 - (D)-18~22AWG
 - (R)-16~20AWG
 - (Q)-12~14AWG

Contact Information

Wire Range	Insulation O.D.	DIM(mm)			
		A	B	C	D
AWG #18-#22	2.80mm(MAX.)	3.3	3.3	2.4	2.4
AWG #16-#20	3.00mm(MAX.)	4.5	4.4	2.9	3.5
AWG #12-#14	3.70mm(MAX.)	6.4	5.7	2.9	3.5

 MATRIX				MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT	SCALE	TITLE		DATE			
mm		6,35mm TERMINAL FEMALE		MARCH 2010			
TOLERANCE: ±0.25				APP. BY			
		MATL		CHK. BY			
		DWG. NO.		DR. BY FELIPE			