

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

SPECIFICATION

Current Rating: 13A AC/DC.



Voltage Rating: 650V AC/DC.

Contact Resistance: 5MΩ (Max)


Insulation Resistance: 1000M Ω Min.

Withstand Voltage: 1500V AC / 1 Minute.


Temperature Range: -25 °C to +85 °C

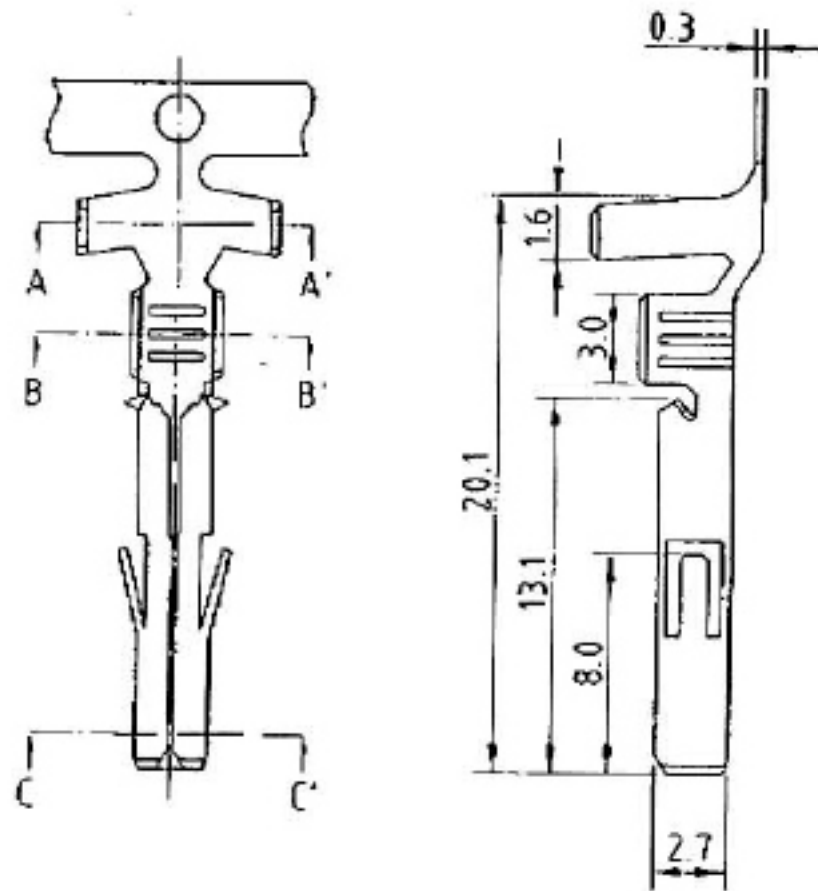

SECTION : A-A'



SECTION : B-B'




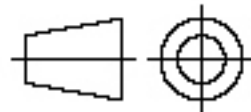
SECTION : C-C'

HOW TO ORDER:
MX-6350-T-F-[]-[]-[]
1 2 3

- 1- Terminal Plating
()-Tin
(D)-Gold Flash
(C)-Selective Gold
- 2- Wire Option
(D)-18~22AWG
(R)-16~20AWG
(Q)-12~14AWG
- 3- (R) RoHS Compliant

Contact Information

Wire Range	Insulation O.D.	DIM(mm)			
		A	B	C	D
AWG #18-#22	2.80mm(MAX.)	3.3	3.3	2.4	2.4
AWG #16-#20	3.00mm(MAX.)	4.5	4.4	2.9	3.5
AWG #12-#14	3.70mm(MAX.)	6.4	5.7	2.9	3.5

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE	TITLE	DATE SEPTEMBER 2007
TOLERANCE: ±0.25		6,35mm TERMINAL FEMALE	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO