

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

**Specification:**




Current rating: 13A

Voltage rating: 600V



Dielectric withstanding voltage: 5000V AC/minute

Ambient temperature rise: -55°C ~ 105°C



Insulation material UL 94V-2

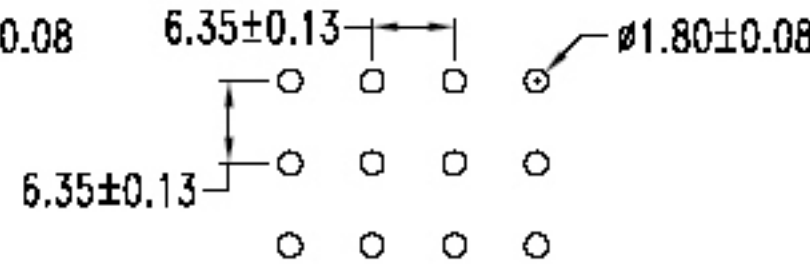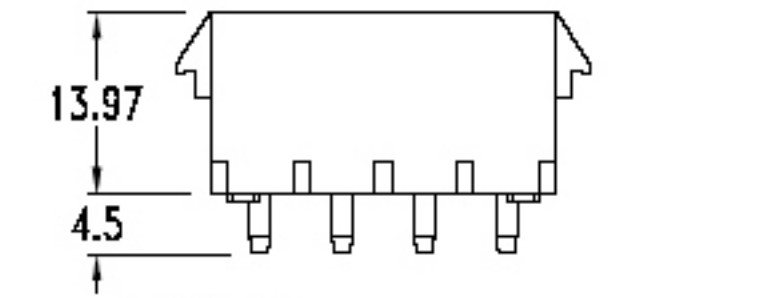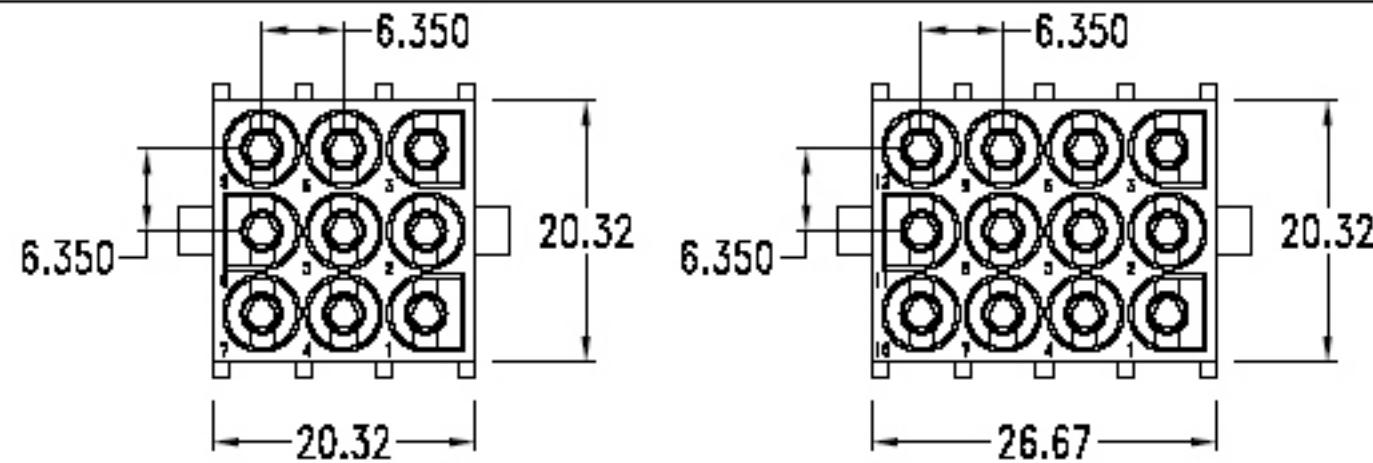


P. C. board layout

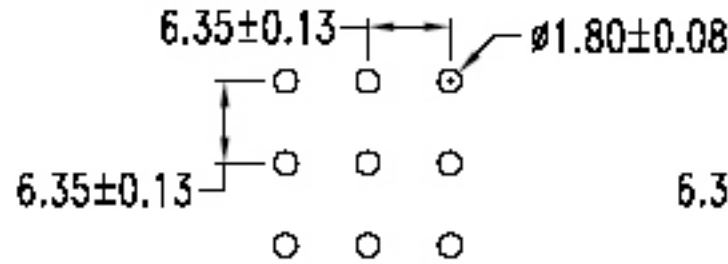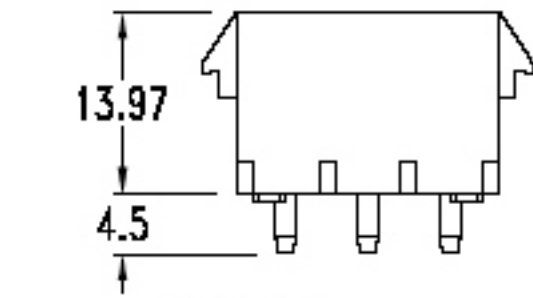

P. C. board layout

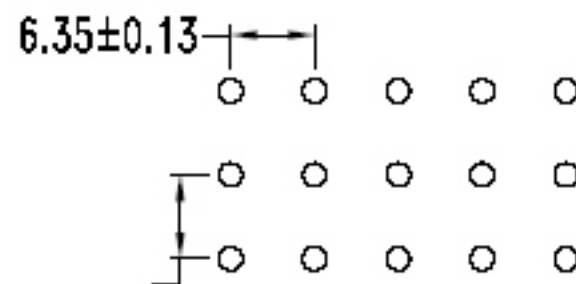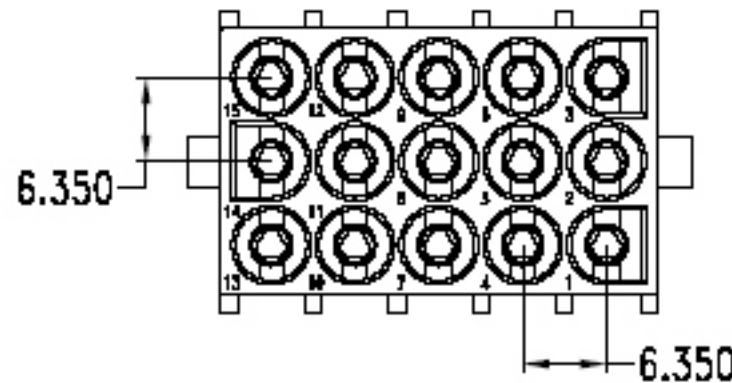

P. C. board layout

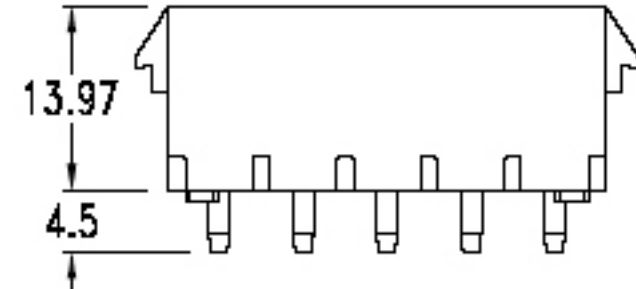

**HOW TO ORDER:**  
**MX-6350-W180-T-F-[ ]-[ ]P-[ ]**  
1 2 3

- 1- Body Option  
(Y)-W/ Polarizing Feature  
(N)-W/O Polarizing Feature
- 2- N° of Contacts  
09, 12, 15
- 3- (R) RoHS Compliant

<b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>			
UNIT mm	SCALE	TITLE 6,35mm WAFER THREE ROW FEMALE	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO