
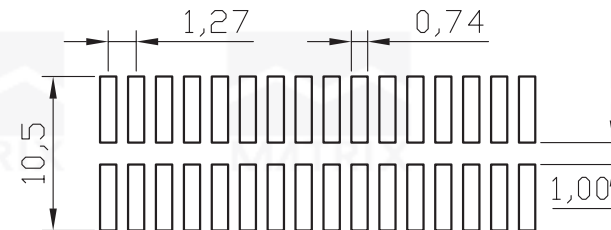


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

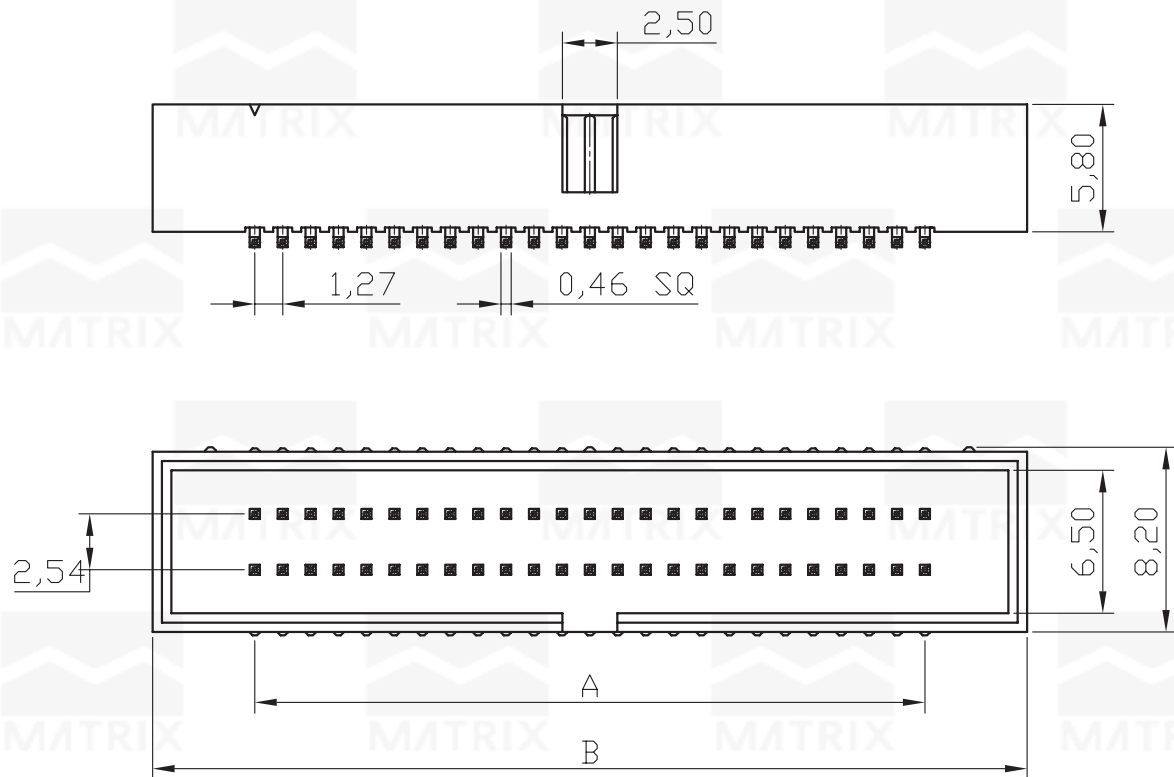

P.C. Board Layout

**HOW TO ORDER:**

**MX-3127-[S]-[ ]-[ ]-1,27x2,54-SMD-[ ]**

**1 2 3 4**

- 1- Pin Style (S)-180°
- 2- Nr. of Ways 20 to 100
- 3- Terminal Plating (D)-FLASH Au (F)-0,38um Au (G)-0,76um Au (C)-0,38um Au/Sn (H)-0,76um Au/Sn
- 4- (R)-RoHS Compliant

Circuits	A	B
20	11,43	20,72
26	15,24	24,53
30	17,78	27,07
34	20,32	29,61
40	24,13	33,42
44	26,67	35,96
50	30,48	39,77
60	36,83	46,12
68	41,91	51,20
80	49,53	58,82
100	62,23	71,52



**MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE 3:1	TITLE 1,27x2,54mm Double Row SMT	DATE August 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO