
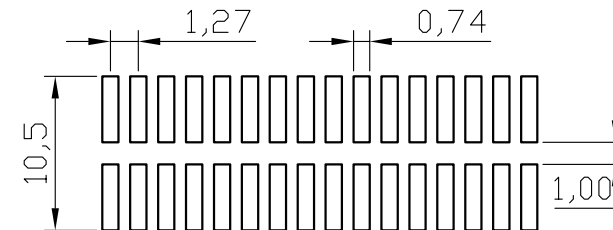
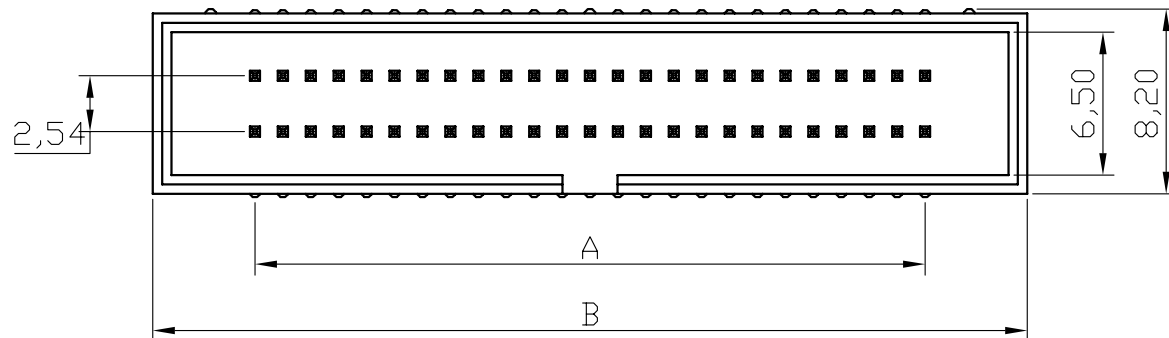



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

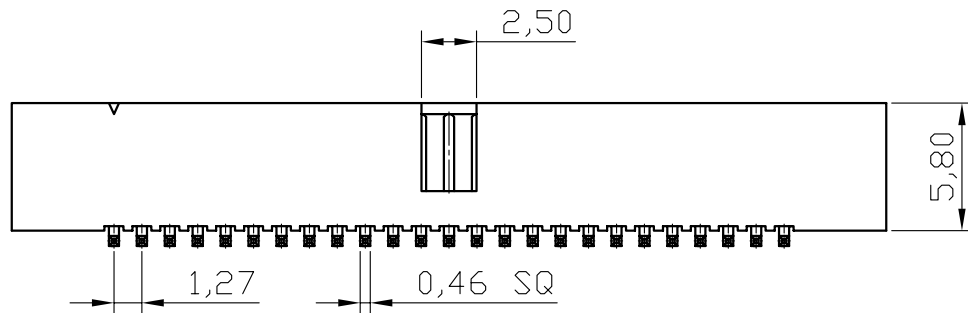

P.C. Board Layout

HOW TO ORDER:
3127[S][][]1,27x2,54DR
1 2 3

- 1- Pin Style (S)-180°
- 2- Nr. of Ways 20 to 100
- 3- Terminal Plating (D)-FLASH Au (F)-0,38um Au (G)-0,76um Au (C)-0,38um Au/Sn (H)-0,76um Au/Sn

Circuits	A	B
20	11,43	20,72
26	15,24	24,53
30	17,78	27,07
34	20,32	29,61
40	24,13	33,42
44	26,67	35,96
50	30,48	39,77
60	36,83	46,12
68	41,91	51,20
80	49,53	58,82
100	62,23	71,52



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT	SCALE	TITLE	DATE
mm	3:1	1,27x2,54mm Double Row SMT	DECEMBER 2009
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE