
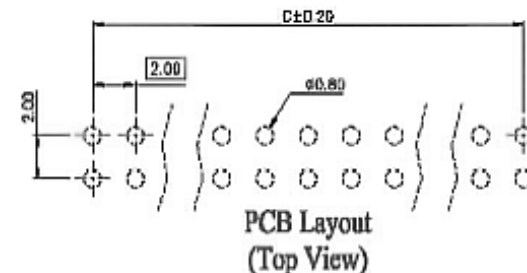


Dimensions			
Pos.	A	B	C
06	13.20	12.10	4.00
08	15.20	14.10	6.00
10	17.20	16.10	8.00
12	19.20	18.10	10.00
14	21.20	20.10	12.00
16	23.20	22.10	14.00
18	25.20	24.10	16.00
20	27.20	26.10	18.00
22	29.20	28.10	20.00
24	31.20	30.10	22.00
26	33.20	32.10	24.00

Dimensions			
Pos.	A	B	C
28	35.20	34.10	26.00
30	37.20	36.10	28.00
32	39.20	38.10	30.00
34	41.20	40.10	32.00
36	43.20	42.10	34.00
40	47.20	46.10	38.00
44	51.20	50.10	42.00
50	57.20	56.10	48.00
60	67.20	66.10	58.00
64	71.20	70.10	62.00
68	75.20	74.10	66.00

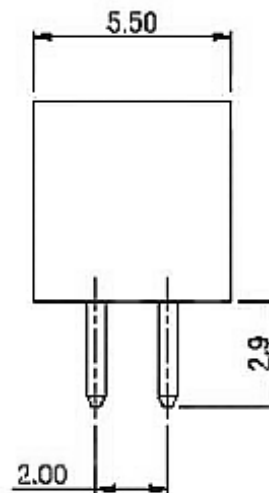

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

### Electrical Characteristics

Current Rating: 1.0 Amp. Max.  
 Dielectric Withstand Voltage:  
 800V AC RMS for 60Seconds.  
 Insulation Resistance:  
 1000M Ohms Min. at 500V DC.

## HOW TO ORDER: 3020[S][ ][ ]R 1 2 3

- 1- Version: (S)-180° (R)-90°
- 2- N° of Ways: See Table
- 3- Terminal Plating: (D)-FLASH Au (F)-0,38um Au (G)-0,76um Au (C)-0,38um Au/Sn (H)-0,76um Au/Sn

		<b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>			
				UNIT mm	SCALE
		TOLERANCE: ±0.25		BOX HEADER 2,00mm PROFILE 5,6mm 180°	APP. BY
				MATL	CHK. BY
		DWG. NO.		DR. BY <b>Felipe</b>	