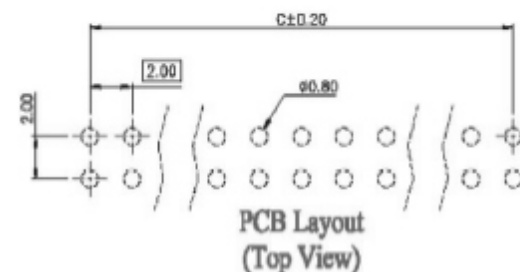


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

### Electrical Characteristics

Current Rating: 1.0 Amp. Max.  
 Dielectric Withstand Voltage:  
 800V AC RMS for 60Seconds.  
 Insulation Resistance:  
 1000M Ohms Min. at 500V DC.





### HOW TO ORDER: MX-3020-[S]-[ ]-[ ]-[ ]

**1 2 3 4**

- 1- Version:  
 (S)-180°  
 (R)-90°
- 2- N° of Ways:  
 See Table
- 3- Terminal Plating:  
 (D)-FLASH Au  
 (F)-0,38um Au  
 (G)-0,76um Au  
 (C)-0,38um Au/Sn  
 (H)-0,76um Au/Sn
- 4- (R)-RoHS Compliant

Dimensions				Dimensions			
Pos.	A	B	C	Pos.	A	B	C
06	13.20	12.10	4.00	28	35.20	34.10	26.00
08	15.20	14.10	6.00	30	37.20	36.10	28.00
10	17.20	16.10	8.00	32	39.20	38.10	30.00
12	19.20	18.10	10.00	34	41.20	40.10	32.00
14	21.20	20.10	12.00	36	43.20	42.10	34.00
16	23.20	22.10	14.00	40	47.20	46.10	38.00
18	25.20	24.10	16.00	44	51.20	50.10	42.00
20	27.20	26.10	18.00	50	57.20	56.10	48.00
22	29.20	28.10	20.00	60	67.20	66.10	58.00
24	31.20	30.10	22.00	64	71.20	70.10	62.00
26	33.20	32.10	24.00	68	75.20	74.10	66.00

 <b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>			
UNIT mm	SCALE	TITLE BOX HEADER 2,00mm PROFILE 5,6mm 180°	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY DINO