
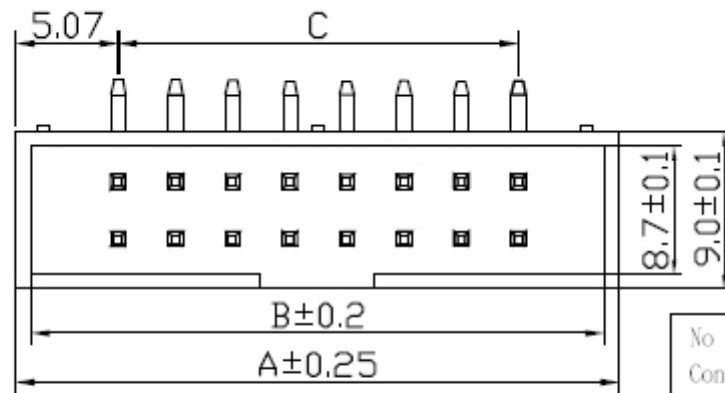
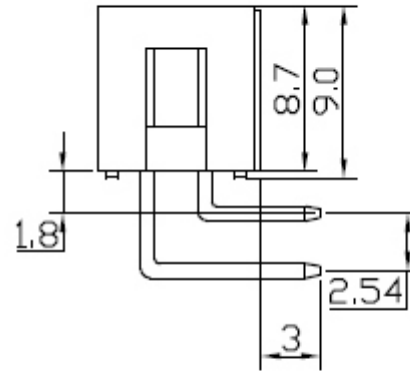


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

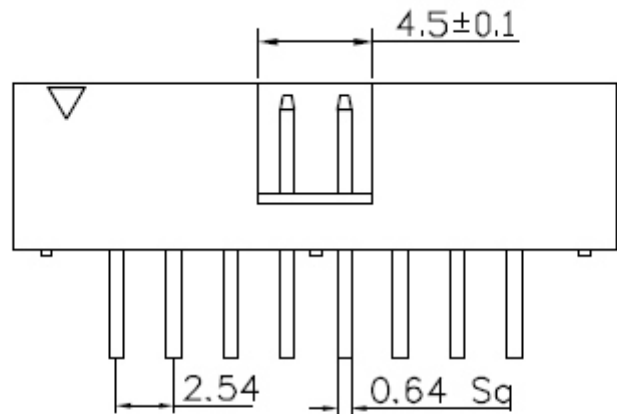


**SPECIFICATIONS**

Current Rating: 1Amps  
 Insulator resistance: 1000 Megohms min.  
 Voltage: AC 500V For One minute  
 Operating Temperature: -55°C~+105°C  
 Contact Resistance: 100ma min. At DC 500V

No of Contacts	Dimensions		
	A	B	C
10pin	20.3	18.1	10.16
14pin	25.38	23.18	15.24
16pin	27.92	25.72	17.78
20pin	33.0	30.8	22.85
26pin	40.62	38.42	30.48
34pin	50.8	48.58	40.64
40pin	58.4	56.2	48.26
50pin	71.1	68.9	60.96

**HOW TO ORDER:**  
**MX-3025-[R]-[ ]-[ ]-[ ]**  
**1 2 3 4**

- 1- Pin Style  
(R)-90°  
(S)-180°
- 2- Nr. of Ways  
10 to 50
- 3- Terminal Plating:  
(D)-FLASH Au  
(F)-0,38um Au  
(G)-0,76um Au  
(C)-0,38um Au/Sn  
(H)-0,76um Au/Sn
- 4- (R)-RoHS Compliant

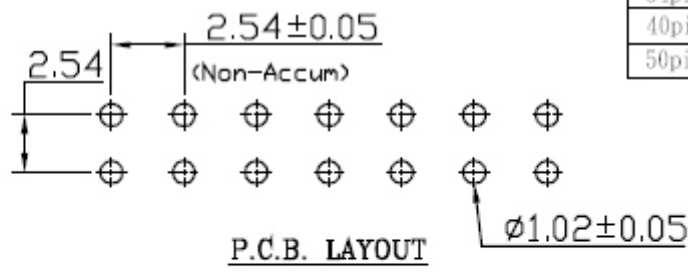

**MATRIX** MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE	TITLE Box Header 2.54mm 90° PHT	DATE SEPTEMBER 2007
TOLERANCE: ±0.25		APP. BY	CHK. BY
		MATL	DR. BY DINO
DWG. NO.			