



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

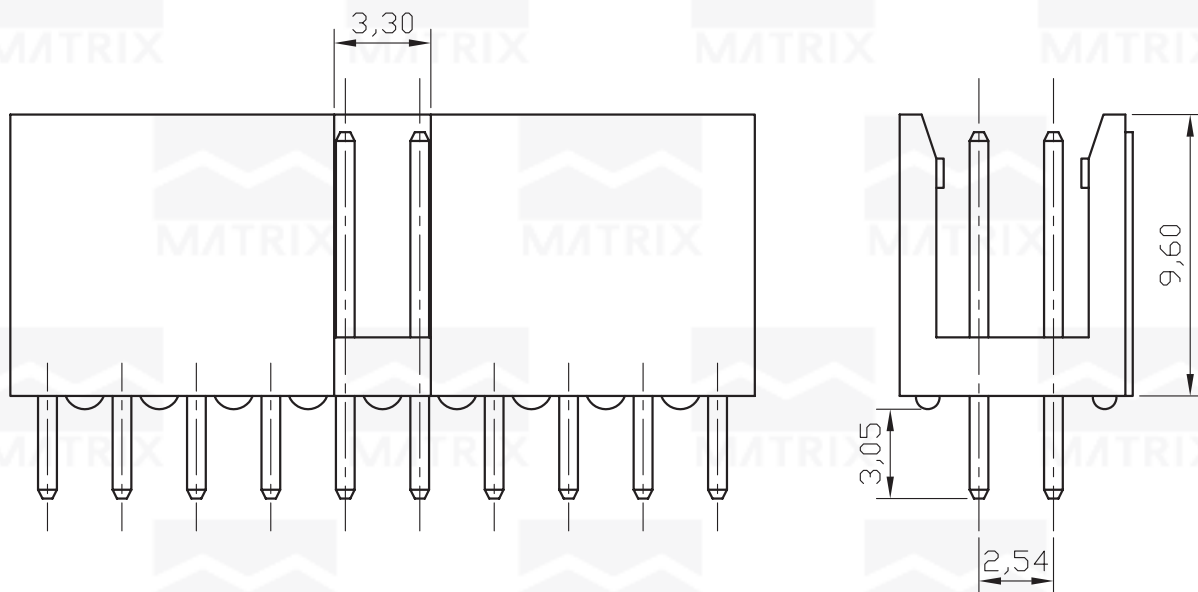

**SPECIFICATIONS**

Current Rating: 3 Amp max.  
 Dielectric Withstanding Voltage: 1000V AC RMS for 1 minute.  
 Insulation Resistance: 5000M Ohms Min. at 1000V DC  
 Operating Temperature: -55°C to 105°C

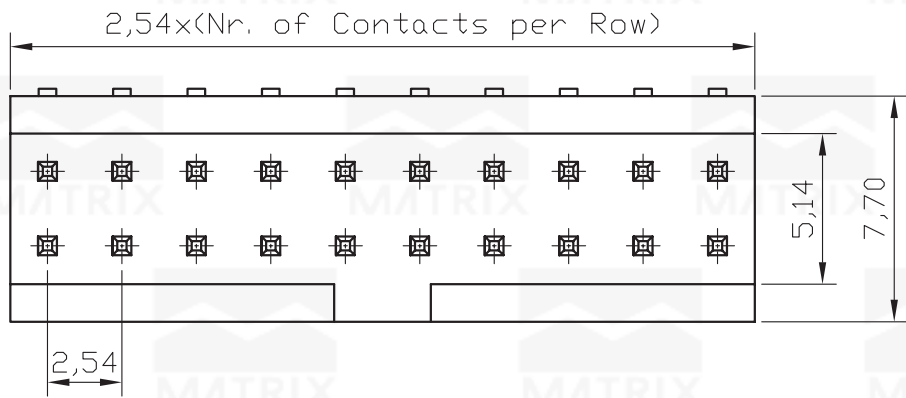


**HOW TO ORDER:  
 MX-3025-SH-[S]-[ ]-[ ]-[ ]**

- 1 2 3 4**
- 1- Pin Style  
(S)-180°  
(R)-90°
  - 2- Nr. of Ways  
6 to 30
  - 3- Terminal Plating:  
(E)-Sn  
(D)-FLASH Au  
(F)-0,38um Au  
(G)-0,76um Au  
(C)-0,38um Au/Sn  
(H)-0,76um Au/Sn

4- (R)-RoHS Compliant

**Recommended P.C.B Layout**

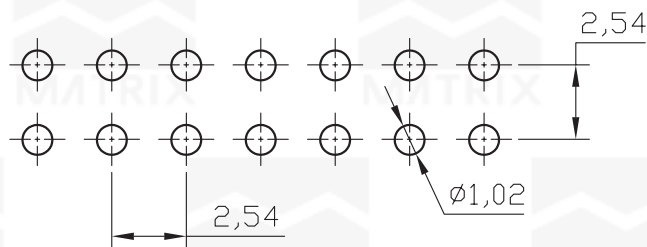

		<b>MATRIX Tecnologia Ind. e Com. Ltda.</b>	
UNIT mm	SCALE 4:1	TITLE Box Header 2.54mm Shrouded Header 180°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY Diego