REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

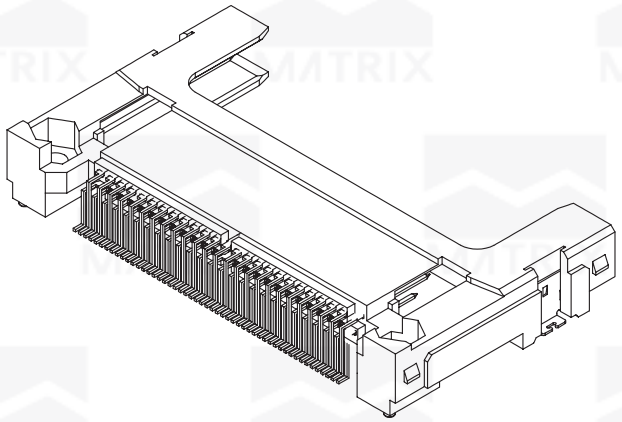

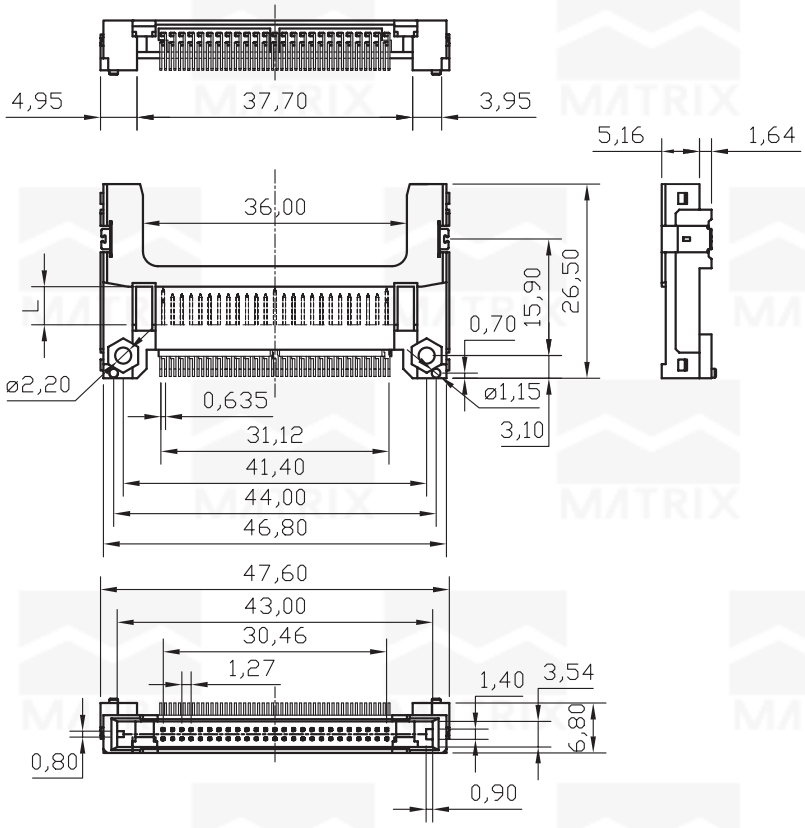

NOTES
MATERIAL
Insulator: Glass Reinforced LCP UL94V–0
Contacts: Brass
Mount ear: Brass;Tin/Lead plated overall
CONTACT PLATING
Contact area: Gold flash plating over 40u" Nickel
Solder tail area:100u" Tin/Lead plating over 40u" Nickel

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

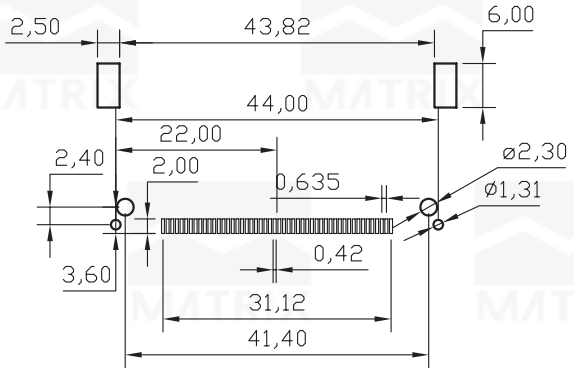

RECOMMENDED P.C.B. LAYOUT

HOW TO ORDER:
MX-CF-7753-W-50[M]-SMD-[ ]
1 2

1- Contact Type
(M)- Type 1
(A)- Type 2
(B)- Slim Type
2- (R) RoHS Compliant

MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE 1:1	TITLE CFA Socket Male 50 Ways Type 1	DATE OCTOBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO