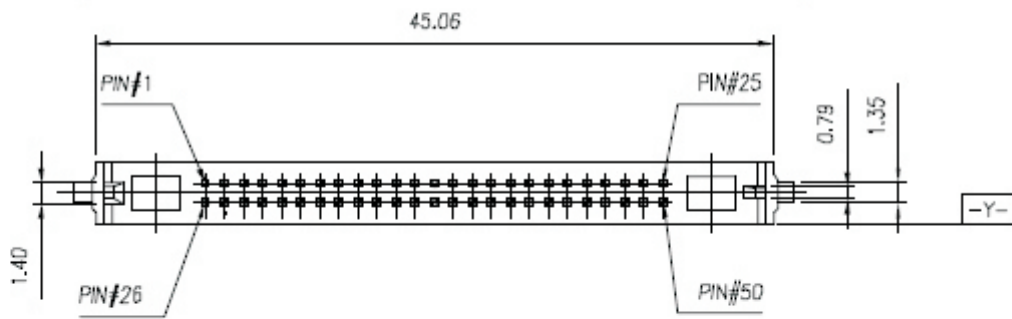


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		


SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE: 40 mΩ max.
 INSULATION RESISTANCE: 1000M Ω max.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C





HOW TO ORDER: MX-C-F-7752-50-M-A-B-[]

1- (R) RoHS Compliant

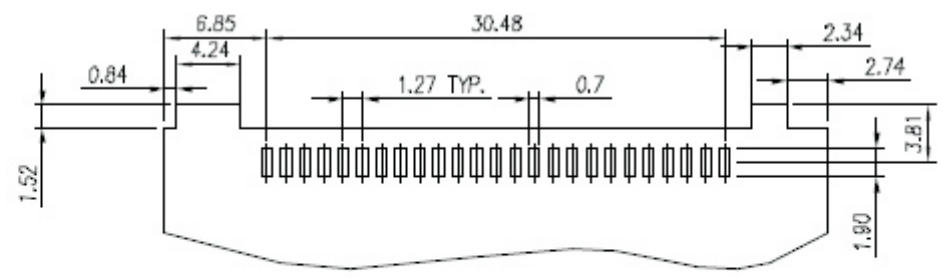

RECOMMENDED P.C.B. PATTERN

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE	TITLE COMPACT FLASH CARD MALE 50 WAYS	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY DIEGO