


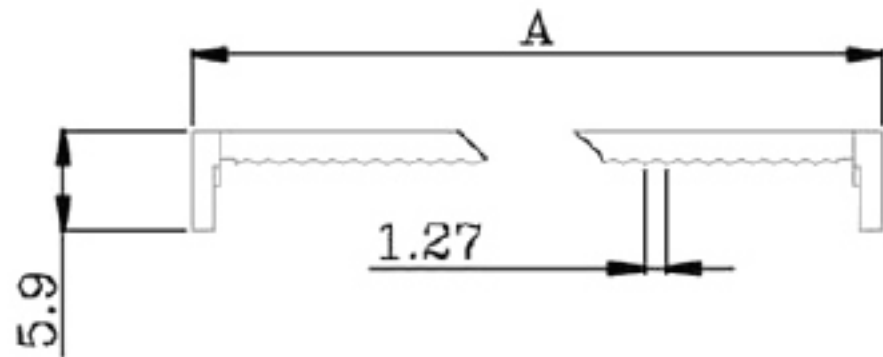

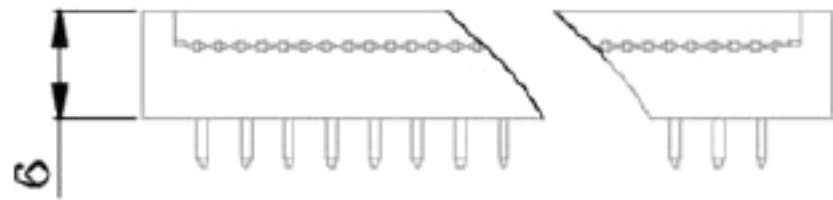


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

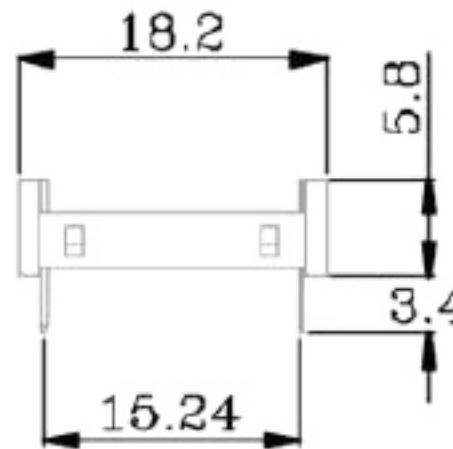

CONTACTS	A	B
24P	35.73	27.94
28P	40.81	33.02
32P	45.89	38.10
36P	51.00	43.18
40P	56.20	48.26

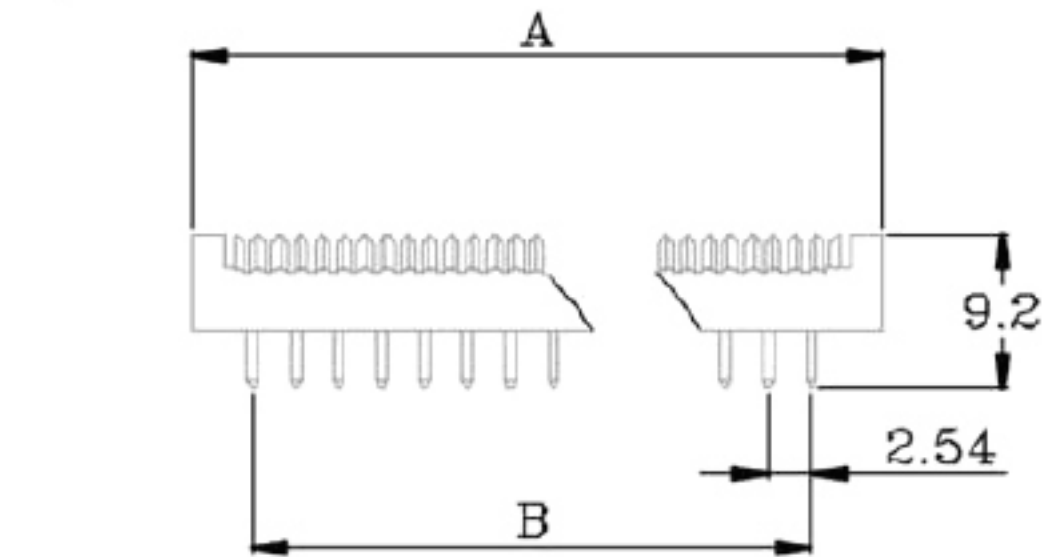

HOW TO ORDER:
MX-4403-[]-[]-[]-2,54x15,24-[]
1 2 3 4

- 1- N° of Ways:
See Table
- 2- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 3-Insulator Color:
(B)-Black
(G)-Grey
- 4- (R) RoHS Compliant

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE 2,54x15,24mm DIP PLUG CONNECTOR	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO