


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

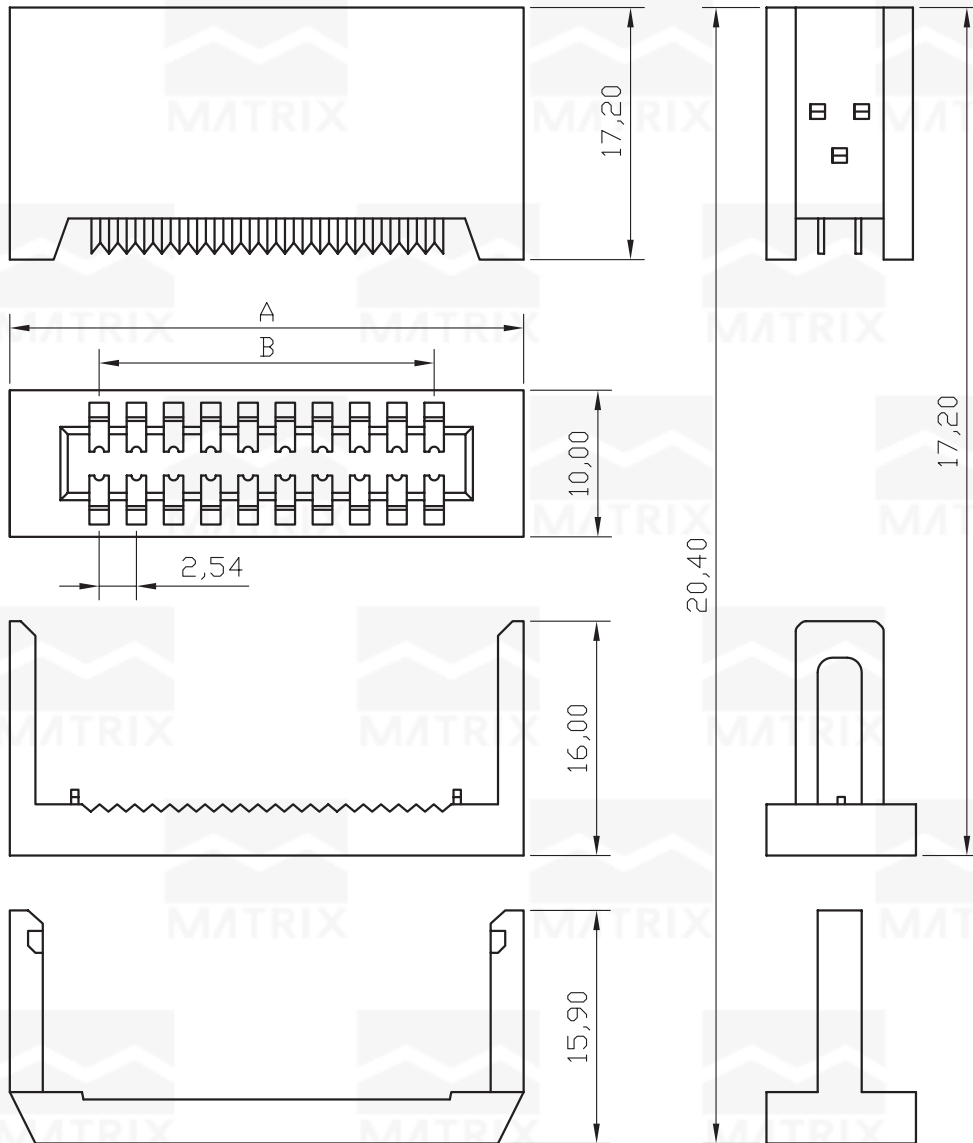

SPECIFICATIONS

Current Rating: 1 Amp
 Contact Resistance: 30mΩ max.
 Insulator Resistance: 3000MΩ min.
 Dielectric Withstanding Voltage: 500V AC for 1 min.
 Operating Temperature: -40°C to 105°C.
 Material Insulator: PBT, Glass reinforced, Rated UL94V-0.
 Contact: Phosphor Bronze or Brass.

POSITION	A	B
10	22,36	10,16
14	27,44	15,24
16	29,98	17,78
20	35,06	22,86
26	42,68	30,48
34	52,84	40,64
40	60,46	48,26
44	65,54	53,34
50	73,16	60,96
56	80,78	68,58
60	85,86	73,66
62	88,40	76,20
64	90,94	78,74

**HOW TO ORDER:
 EDGE-[]-IDC-[SR]-[]-[]**

- 1** 1- Nr. of Ways
 See Table
- 2** 2- Function:
 (SR)-With Strain Relief
 ()-Without Strain Relief
- 3** 3- Terminal Plating:
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 4** 4-(R) RoHS Compliant

MATRIX **MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE 2:1	TITLE	DATE September 2007
TOLERANCE: ±0.25		CARD EDGE 2,54mm IDC TYPE	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego