


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

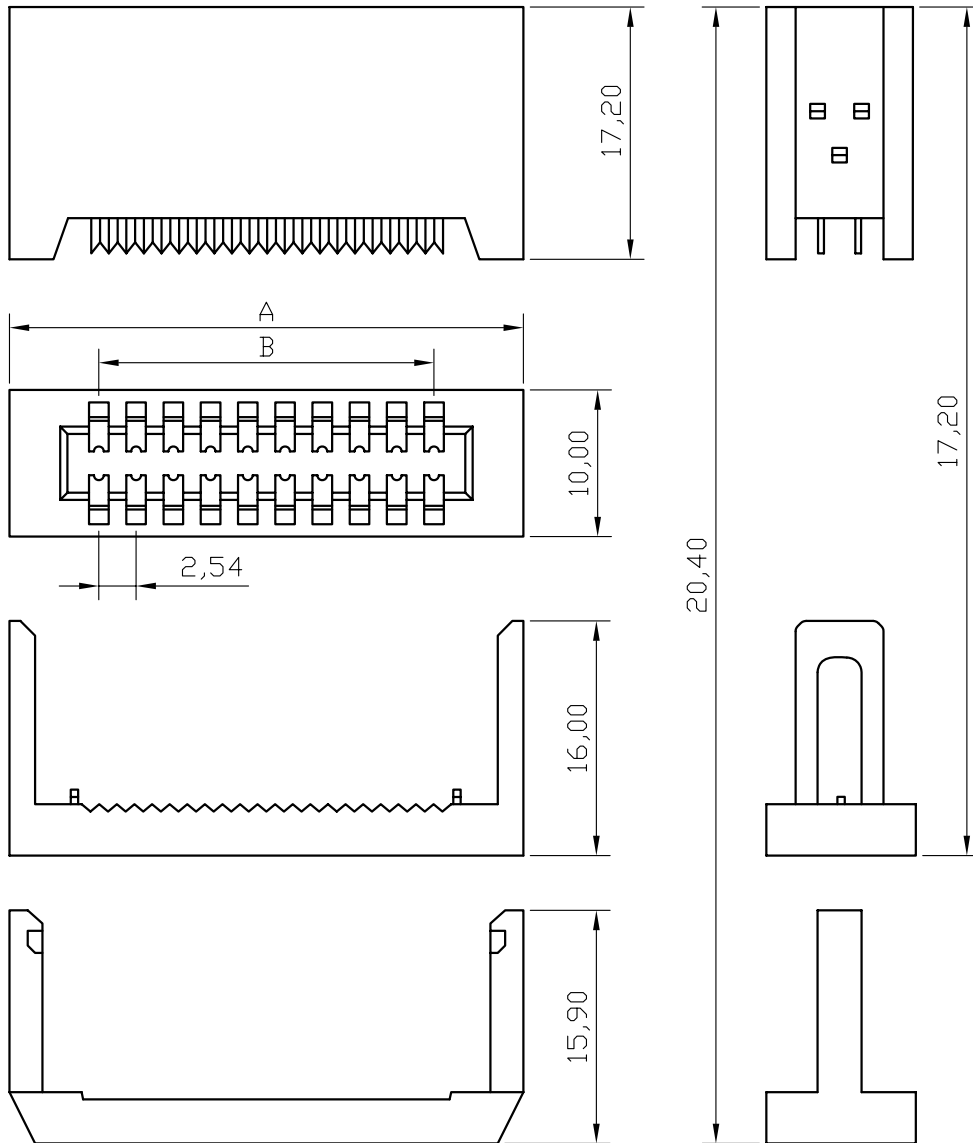

SPECIFICATIONS

Current Rating: 1 Amp
 Contact Resistance: 30mΩ max.
 Insulator Resistance: 3000MΩ min.
 Dielectric Withstanding Voltage: 500V AC for 1 min.
 Operating Temperature: -40°C to 105°C.
 Material Insulator: PBT, Glass reinforced, Rated UL94V-0.
 Contact: Phosphor Bronze or Brass.

POSITION	A	B
10	22,36	10,16
14	27,44	15,24
16	29,98	17,78
20	35,06	22,86
26	42,68	30,48
34	52,84	40,64
40	60,46	48,26
44	65,54	53,34
50	73,16	60,96
56	80,78	68,58
60	85,86	73,66
62	88,40	76,20
64	90,94	78,74

**HOW TO ORDER:
EDGE[]IDC[SR][]R**

1 2 3

- 1- Nr. of Ways
See Table
- 2- Function:
(SR)-With Strain Relief
()-Without Strain Relief
- 3- Terminal Plating:
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 2:1	TITLE CARD EDGE 2,54mm IDC TYPE	DATE MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE