



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

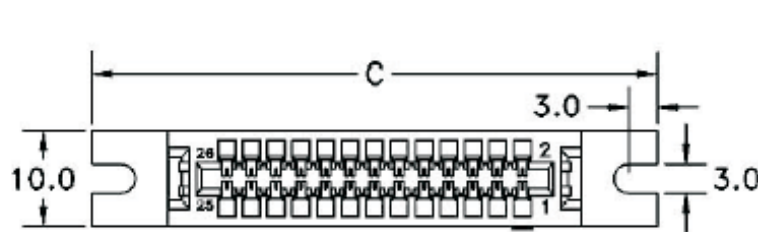




(TYPE B)

*WITH FORK MOUNTING EAR

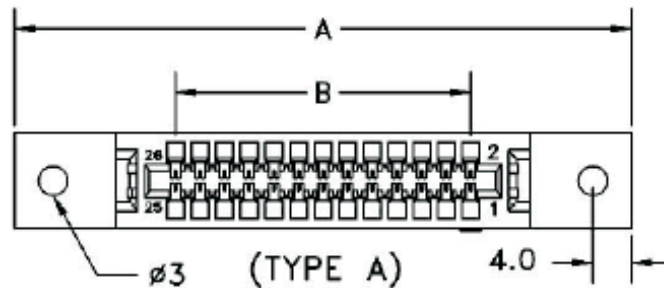

(TYPE A)

*WITH MOUNTING EAR

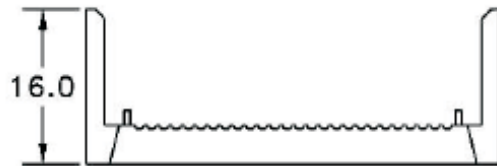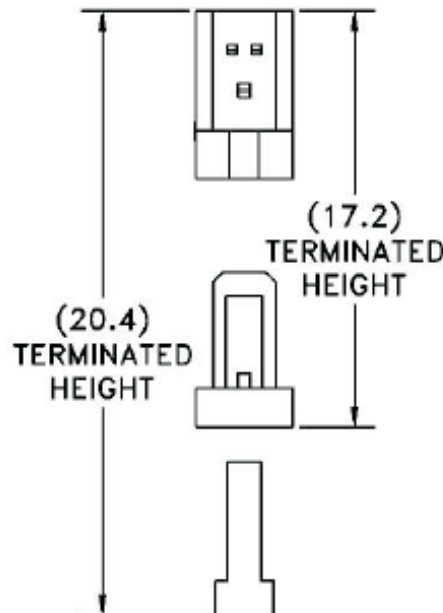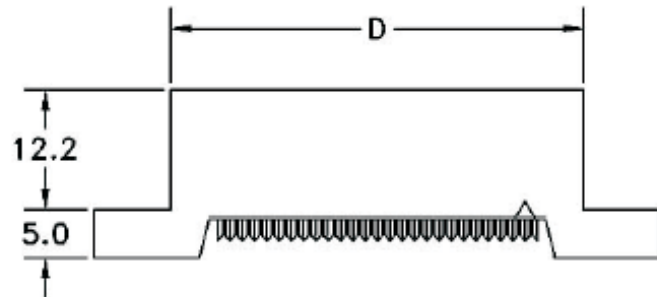

SPECIFICATIONS

Electrical

Current Rating: 1 Amp

Contact Resistance: 30 mΩ max.

Insulation Resistance: 3000 MΩ min.

Dielectric Withstanding Voltage: 500V AC for 1 minute

Operating Temperature: -40°C to +105°C

**HOW TO ORDER:
EDGE[]IDC[][SR][]R**

1 2 3 4

1- Nr. of Ways
See Table

2- Insulator Option:
(E)-With Mounting Ear
(F)-With Fork Mounting Ear

3- Function:
(SR)-With Strain Relief
()-Without Stain Relief

4- Terminal Plating:
(E)-Sn

(D)-FLASH Au

(F)-0,38um Au

(G)-0,76um Au

(C)-0,38um Au/Sn

(H)-0,76um Au/Sn

POSITION	A	B	C	D
10	43.06	10.16	38.06	22.36
14	48.14	15.24	43.14	27.44
16	50.68	17.78	45.68	29.98
20	55.76	22.86	50.76	35.06
26	63.38	30.48	58.38	42.68
34	73.54	40.64	68.54	52.84
40	81.16	48.26	76.16	60.46
50	93.86	60.96	88.86	73.16
60	106.56	73.66	101.56	85.86
62	109.10	76.20	104.10	88.40
64	111.64	78.74	106.64	90.94

DATE September 2007



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT	SCALE	TITLE	DATE
mm		CARD EDGE 2,54mm IDC TYPE WITH EAR	MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE