

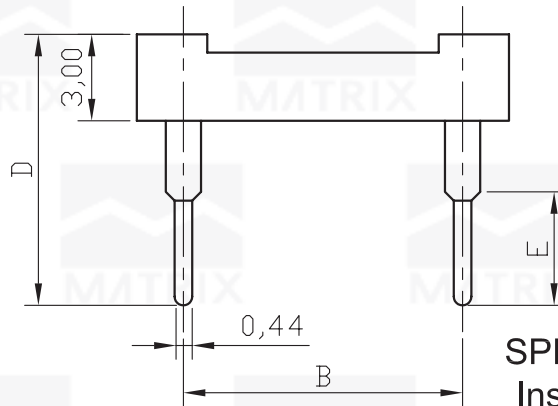


REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

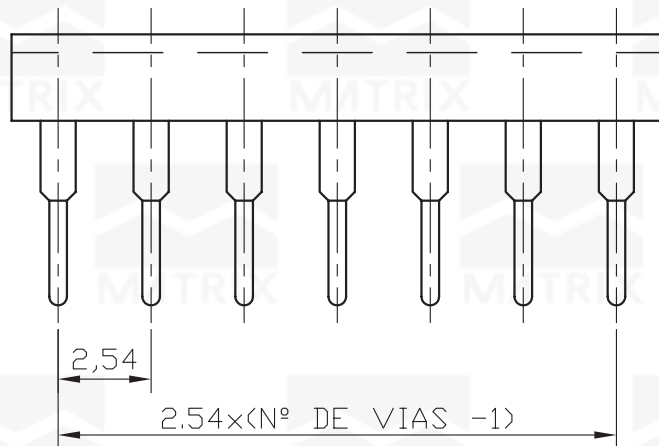

SPECIFICATIONS:

- Insulator: Black Glass filled Polyester UL 94V-0
- Current Rating: 1Amp
- Contact Resistance: max. 10mΩ
- Dielectric Strength: min. 1000 V_{RMS}
- Operating Temperature: -55°C to 125°C
- Max. Working Voltage: 100 V_{RMS} / 150 V_{DC}
- Insulator Resistance: 500V AC

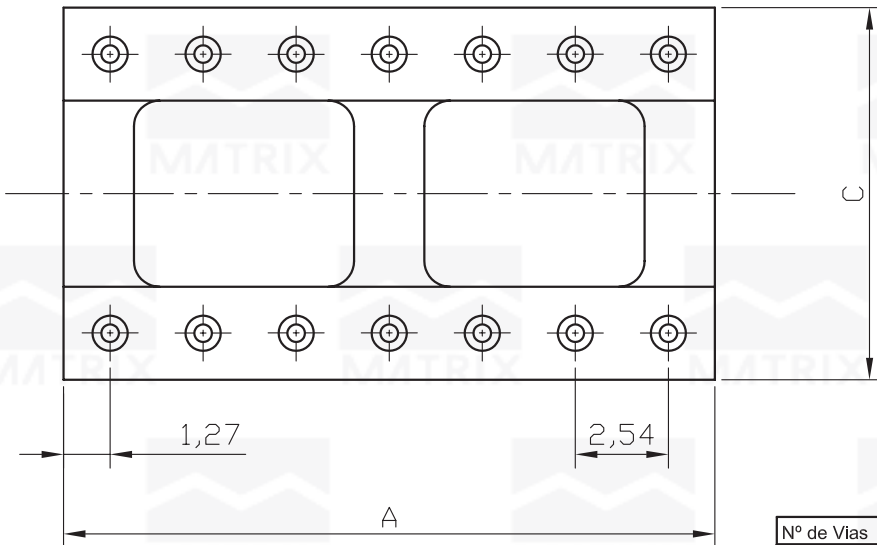

Nº de Vias	A	B	C
06	7.62	7.62	10.16
08	10.16	7.62	10.16
14	17.78	7.62	10.16
16	20.32	7.62	10.16
18	22.86	7.62	10.16
20	25.40	7.62	10.16
22	27.94	10.16	12.70
24	30.48	15.24	17.78
24I*	30.40	7.62	10.16
28	35.56	15.24	17.78
28I*	35.40	7.62	10.16
32	40.62	15.24	17.78
40	50.80	15.24	17.78

Tabela 1 * Versão Estreita

PINO	D	E
SCI	7.40	3.10
SCT	8.00	3.70
SCL	11.10	6.80
SCZ	12.00	3.15
SCM	25.80	4.50

Tabela 2

HOW TO ORDER:
SC-[]-[]-[]-[]-[]
1 2 3 4 5 6



- 1- Height Pin: Table 2
- 2- Num. Ways: Table 1
- 3- Spring Plating: (E)-Sn (D)-FLASH Au (F)-0,38um Au (G)-0,76um Au
- 4- Terminal Plating: (E)-Sn (D)-FLASH Au (F)-0,38um Au (G)-0,76um Au
- 5- Insulator: (N)- HB (P)- V0
- 6- (R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.


UNIT mm	SCALE 5:1	TITLE Sockets	DATE AUGUST 2007
TOLERANCE: ±0.25		Machined Pin	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

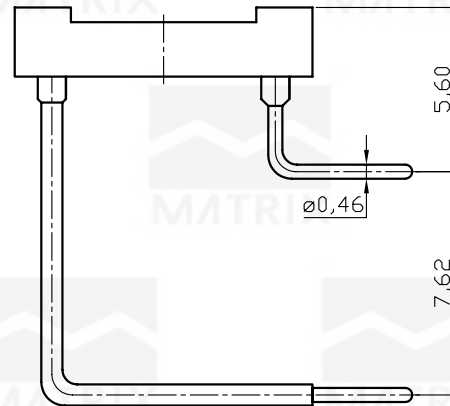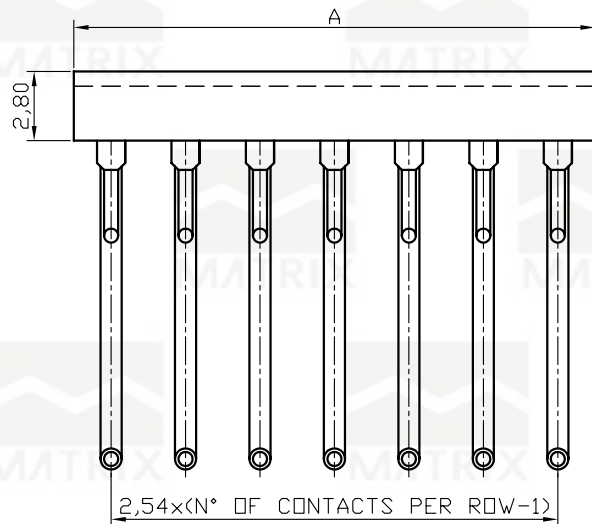

Table



Contacts	A
06	7.62
08	10.16
10	12.70
12	15.24
14	17.78
16	20.32
18	22.86
20	25.40
22	30.04
24	30.48

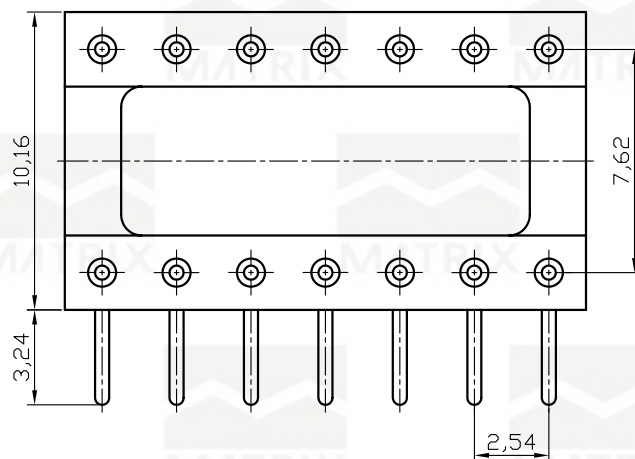

HOW TO ORDER: SC-R-[]-H-[]-[]-[]

1 2 3 4

- 1- N° of Contacts: Table
- 2- Spring Plating: (E)-Sn (D)-FLASH Au (F)-0,38um Au (G)-0,76um Au
- 3- Terminal Plating: (E)-Sn
- 4- (R) RoHS Compliant

 MATRIX		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE	DATE OCTOBER 2007
TOLERANCE: ± 0.25		SOCKET 90°	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO