



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

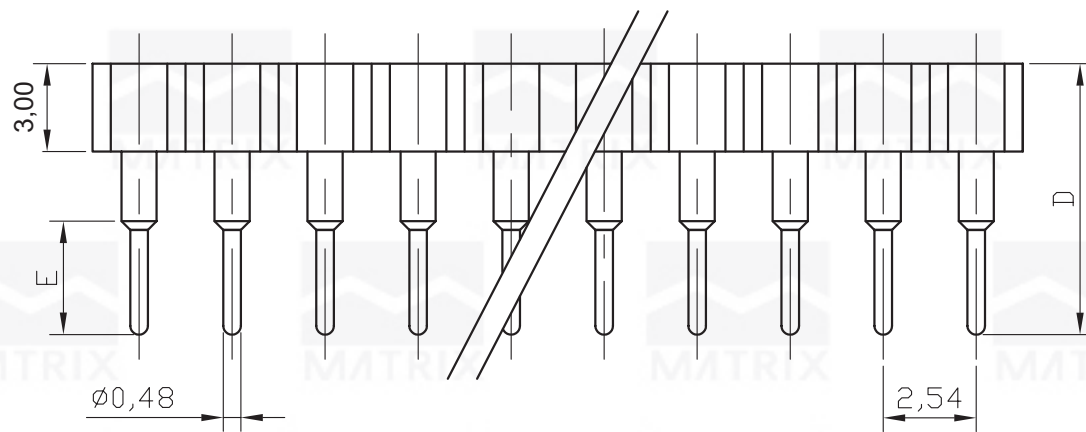

PINO	D	E
BSCI	7.40	3.10
BSCT	8.00	3.70
B_SCL	11.10	6.80
BSCZ	12.00	3.15
BSCM	25.80	4.50

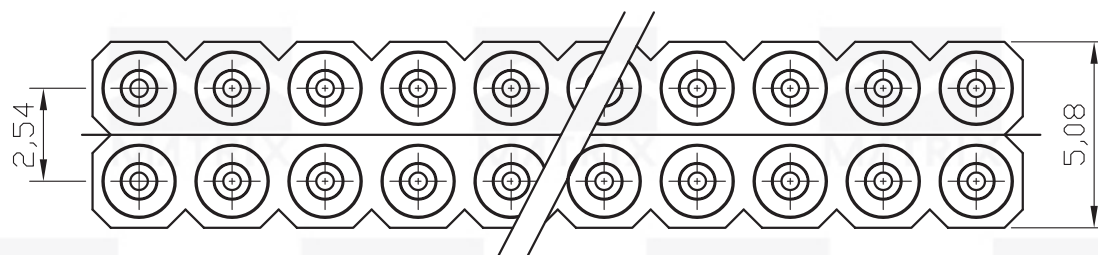

HOW TO ORDER: BSC-[]-[]-[]-[]-[]-[]-[]

1 2 3 4 5 6 7

- 1- Height Pin:
Table 1
- 2- Num. Ways:
Single Row: 1x1 to 1x50
Double Row: 2x1 to 2x40
- 3- Spring Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
- 5- Insulator:
(N)- HB
(P)- V0
- 6- (D) Double Row
() Single Row
- 7- (R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 5:1	TITLE Sip Socket Machined Pin	DATE September 2007
TOLERANCE: ± 0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego