


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

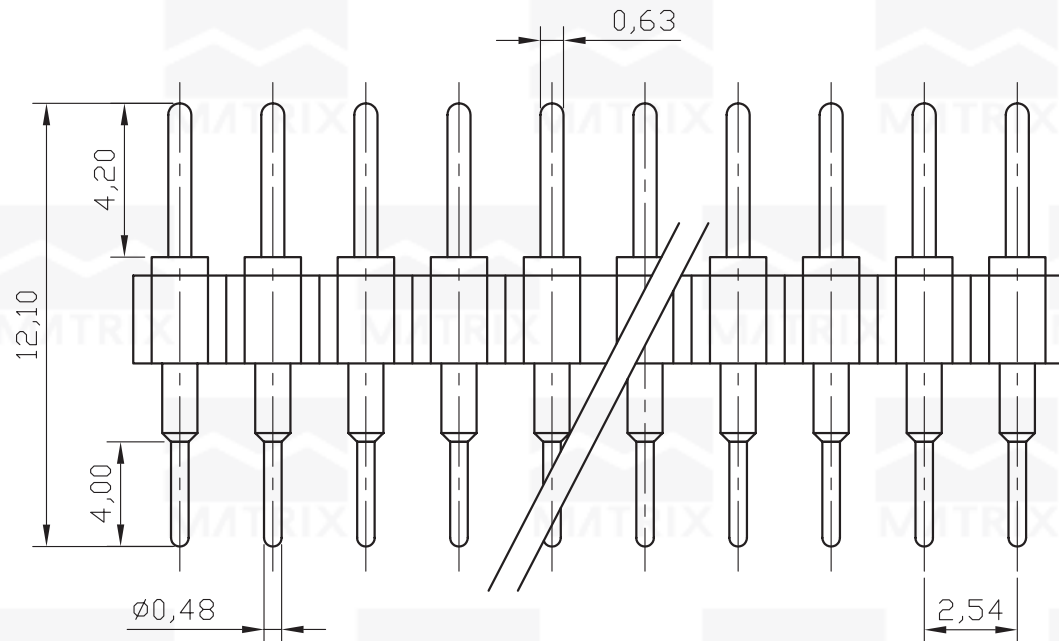

**HOW TO ORDER:**  
**BSCB-[ ]-[ ]-P-[ ]**  
**1 2 3**

1- Num. Ways:  
 Single Row: 1x1 to 1x50  
 Double Row: 2x1 to 2x40

2- Spring Plating:  
 (E)-Sn  
 (D)-FLASH Au  
 (F)-0,38um Au  
 (G)-0,76um Au

3- (R) RoHS Compliant



**MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE 5:1	TITLE Sip Socket Type Piggy-Back	DATE September 2007
TOLERANCE: $\pm 0.25$			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego