


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

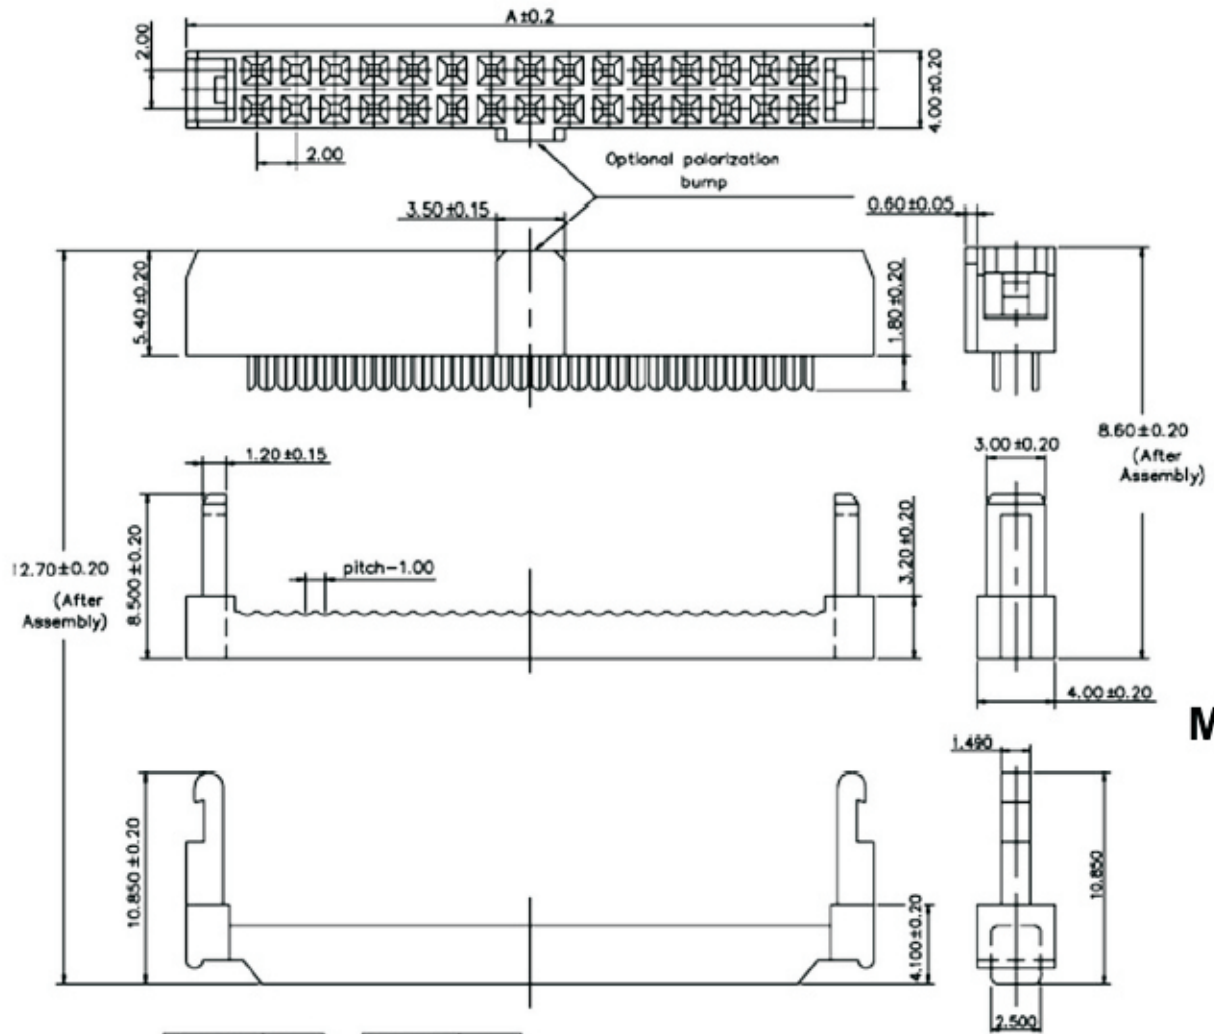

HOW TO ORDER:
MX-4401-[]-[SR]-[]-[]-2-[]
1 2 3 4 5

- 1- Nr. of Ways
See Table
- 2- Function
(SR) With Strain Relief
() Without Strain Relief
- 3- Terminal Plating
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 4- Body Option
(WB) With Bump
() Without Bump
- 5- (R) RoHS Compliant

CONTACTS	A
6PIN	11.20
8PIN	13.20
10PIN	15.20
12PIN	17.20
14PIN	19.20
16PIN	21.20
18PIN	23.20
20PIN	25.20
22PIN	27.20
24PIN	29.20

CONTACTS	A
26PIN	31.20
28PIN	33.20
30PIN	35.20
32PIN	37.20
34PIN	39.20
36PIN	41.20
40PIN	45.20
44PIN	49.20
50PIN	55.20
68PIN	73.20

MATRIX MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE	TITLE IDC SOCKET 2,00mm	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO