


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

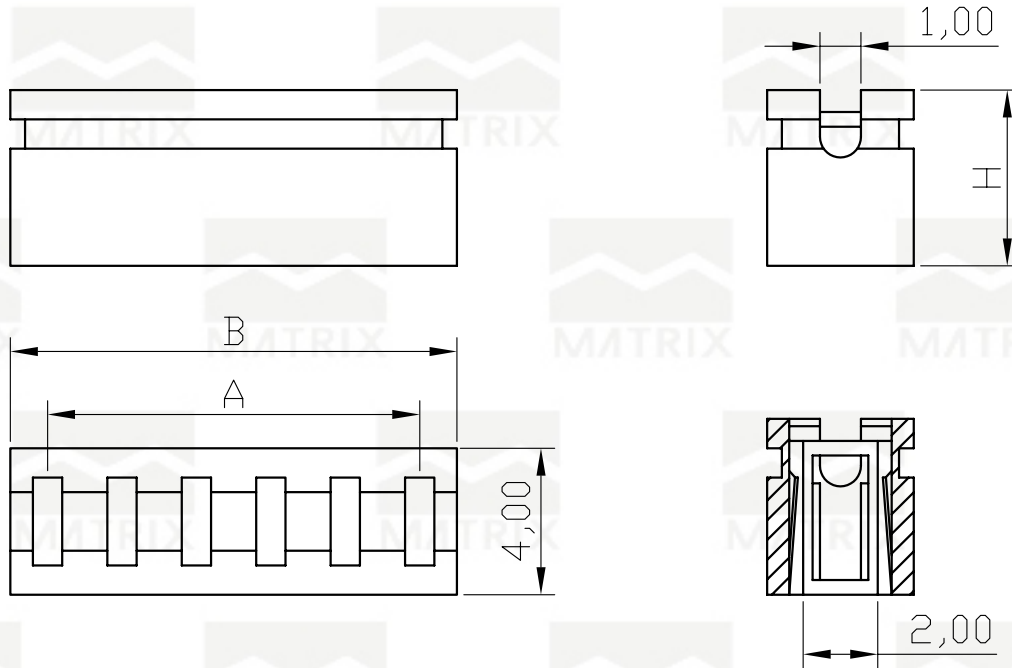

**SPECIFICATION**

Current Rating: 3Amp  
 Dielectric Withstanding Voltage: 650VAC (1mm)  
 Insulation Resistance: 1000M minimum  
 Contact Resistance: 30m maximum

**HOW TO ORDER:  
 MJM-02-[ ]-[ ]-B-P-[ ]-2-[ ]**

**1 2 3 4**

- 1- Nr. of Positions 3- Type:
- 2 to 10 Table (Height)
- 2- Terminal Plating 4- (R)RoHS Compliant
- (E)-Tinned
- (D)-FLASH Au
- (A)-0.38um Au
- (B)-0.76um Au

POSITIONS	A	B
2	2,00	4,00
3	4,00	6,00
4	6,00	8,00
5	8,00	10,00
6	10,00	12,00
7	12,00	14,00
8	14,00	16,00
9	16,00	18,00
10	18,00	20,00

TABLE	
TYPE	H
A	3,50
B	4,30



**MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE 5:1	TITLE JUMPER BLOCK 2.00mm	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego