


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		



SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : 500V AC for one minute
 Operation Temperature : -55°C to +105°C

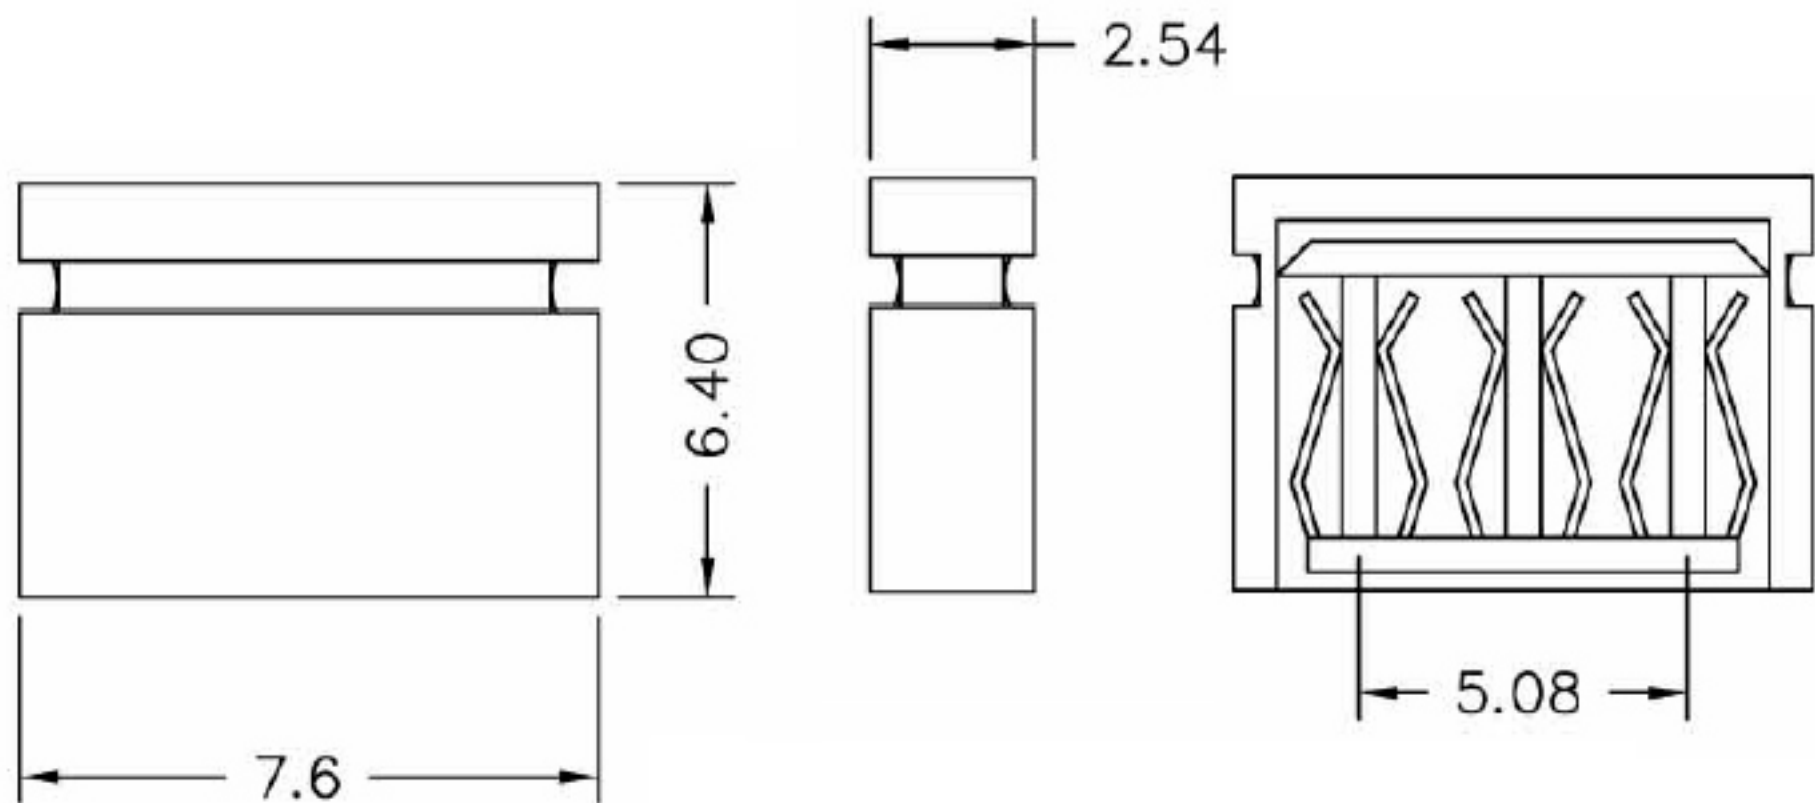

HOW TO ORDER:
MJM-02-[]-[TC]-5.08-[]
 1 2

- 1- Terminal Plating
 (E)-Tinned
 (D)-FLASH Au
 (A)-0.38um Au
 (B)-0.76um Au
- 2- (R)RoHS Compliant

 MATRIX Tecnologia Ind. e Com. Ltda.		UNIT	SCALE	TITLE	DATE
		mm		Mini Jumper Close Type 5.08mm	September 2007
TOLERANCE: ±0.25				APP. BY	
		MATL		CHK. BY	
		DWG. NO.		DR. BY Dino	