




REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		



SPECIFICATIONS

Current Rating: 1Amp
 Insulator Resistance: 5000MΩ min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to 105°C
 Max Processing Temp: 230°C for 30~60 seconds
 (260°C for 10 seconds)
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nyplon 6T

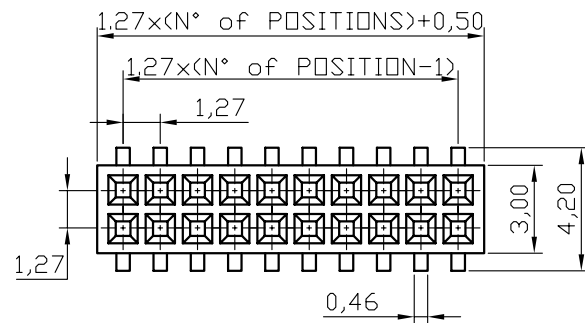

Recommended P.C.Board
SMD Layout

HOW TO ORDER: MAT[][D][R][][S][E]D[T][][R] 1 2 3 4 5 6 7 8

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style*
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 5- Pitch:
(E)-1,27mm x 1,27mm
- 6- Profile:
(T)-2,00mm
- 7- Options:
(T)-Tube Packing
(R)-Reel Packing
(C)-Cap+Tube
(Q)-Cap+Reel
(Y)-With Locating Peg (Tube)
(I)-With Locating Peg (Reel)
(P)-Peg+Cap+Tube
(E)-Peg+Cap+Reel
- 8- (R)RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE	DATE JUNE 2007
0.00±	UNIT mm	1.27mm FEMALE HEADER	APP. BY
0.000±		HEIGHT 2,0mm DOUBLE ROW UPPER CONTACT SMT TYPE	
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO