




REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		



SPECIFICATIONS

Current Rating: 1Amp
 Insulator Resistance: 5000MΩ min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to 105°C
 Max Processing Temp: 230°C for 30~60 seconds
 (260°C for 10 seconds)
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon 6T

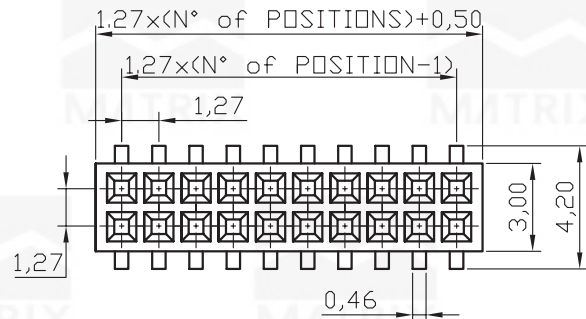

Recommended P.C.Board SMD Layout

HOW TO ORDER:
MAT-[] [D] [R] [] S1,27SMD-P2[] -[]
1 2 3 4 5 6

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 5- (P)-w/Locating Peg
()-w/o Locating Peg
- 6- (R)RoHS Compliant

		MATRIX Tecnologia Ind. e Com. Ltda.	
0.0±	SCALE	TITLE	DATE JUNE 2007
0.00±	UNIT mm	1.27mm FEMALE HEADER	APP. BY
0.000±		HEIGHT 2,0mm DOUBLE ROW UPPER CONTACT SMT TYPE	
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO