


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

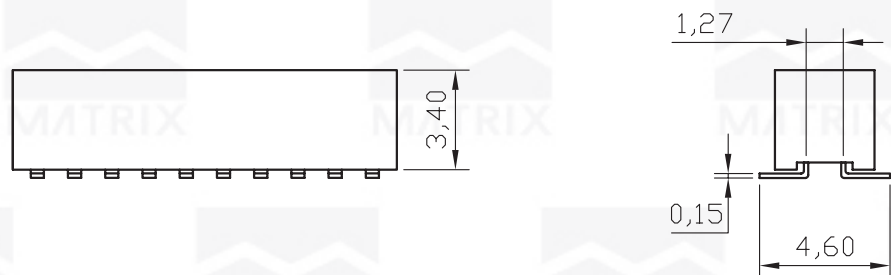


SPECIFICATIONS

Current Rating: 1Amp
 Insulator Resistance: 1000MΩ min.
 Contact Resistance: 30mΩ max.
 Withstanding Voltage: AC 500V
 Operating Temperature: -55°C to 105°C

MATERIAL

Contact: Phosphor Bronze
 Insulator: Nylon 6T

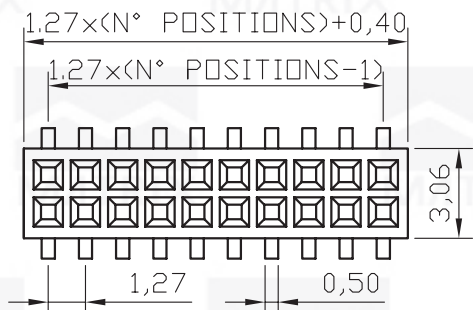




HOW TO ORDER:

MAT-[]-[D]-[R]-[]-S-1.27-SMD-P3,4-[]
 1 2 3 4 5

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 5- (R)RoHS Compliant

RECOMMENDED P.C.B. LAYOUT

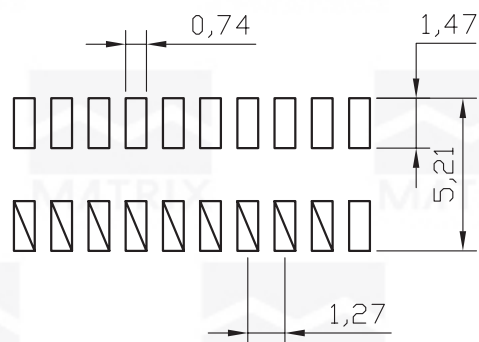

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE 4:1	TITLE 1,27x1,27mm FEMALE HEADER HEIGHT 3,4mm DOUBLE ROW 180° SMD TYPE	DATE OCTOBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego