

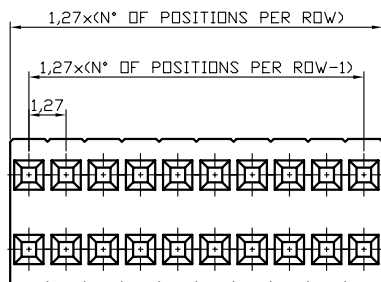
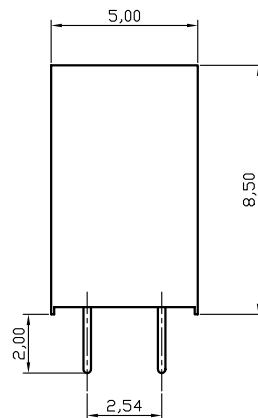


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

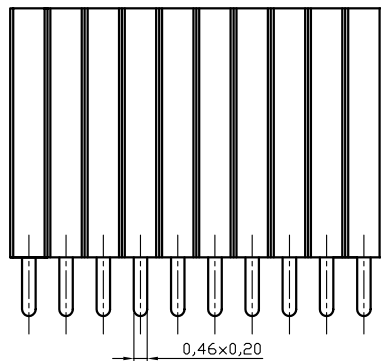




Recommended P.C.Board Layout

**SPECIFICATIONS**

Currente Rating: 1Amp  
 Insulation Resistance: 5000MΩ Min.  
 Dielectric Withstanding: AC 500V  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to 105°C  
 Max Processing Temp: 230°C for 30 seconds

**HOW TO ORDER:**  
**MAT-[ ]-[D]-[R]-[ ]-S-1.27x2.54-P8.5-[ ]**  
**1 2 3 4 5**

- 1- Nr. of Ways  
Double Row: 2 to 100
- 2- Row Version:  
(D)-Double Row
- 3- Pin Style  
(R)-180°
- 4- Terminal Plating:  
(E)-Sn  
(D)-FLASH Au  
(F)-0,38um Au  
(G)-0,76um Au  
(C)-0,38um Au/Sn  
(H)-0,76um Au/Sn
- 5- (R)RoHS Compliant

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>			
0.0±	SCALE	TITLE	DATE JUNE 2007
0.00±	UNIT mm	1.27x2.54mm FEMALE HEADER	APP. BY
0.000±		HEIGHT 8.5mm 180° DOUBLE ROW	
 	MATL	CHK. BY	
	DWG. NO.	DR. BY DIEGO	