

REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

SPECIFICATIONS

Electrical

Current Rating: 1Amp DC

Contact Resistance: 20mΩ max.

Insulation Resistance: 5000MΩ min.




Dielectric Withstanding Voltage: 500V AC

Operating Temperature: -40°C to 105°C

Material

Insulator: Polyester, UL94V-0

Contact: Phosphor Bronze

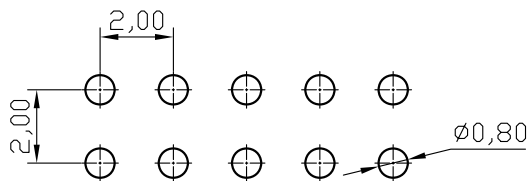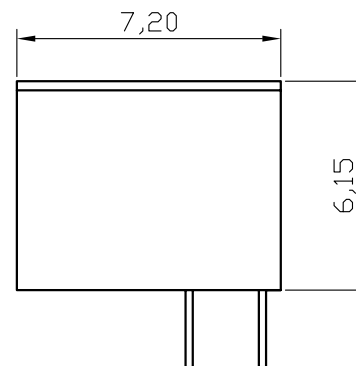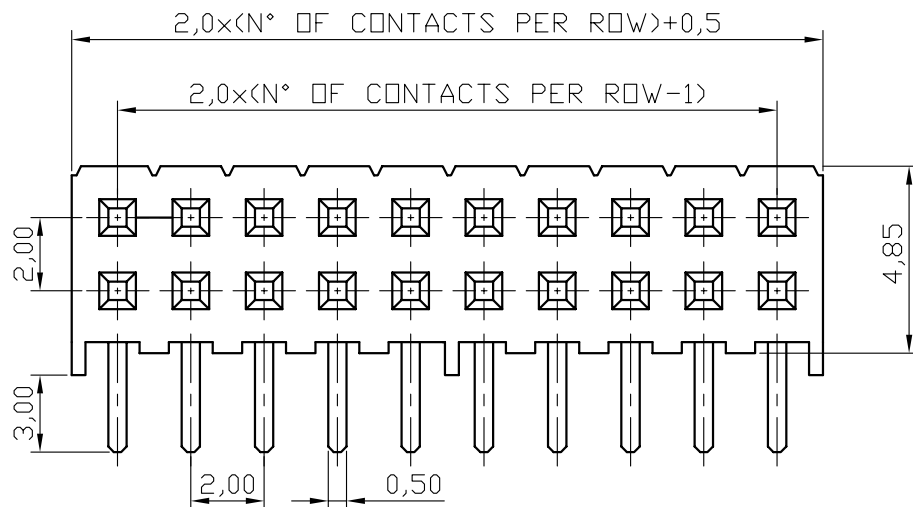

Recommended P.C. Board
Hole Layout

**HOW TO ORDER:
MAT[][D][N][]S2[W][R]**

1 2 3 4 5 6

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(N)-90°

- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 5- Profile:
(W)-7,20mm (Width: 6,15mm
- 6- (R)RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 5:1	TITLE 7.2x6.15mm FEMALE HEADER 90° WAVY DOUBLE ROW	DATE JUNE 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO