

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		



SPECIFICATIONS

Material

Insulator: PBT, glass reinforced, rated UL94V-0
Contact: Phosphor Bronze

Electrical

Current Rating: 1Amp DC
Contact Resistance: 30mΩ max.
Insulation Resistance: 3000MΩ min.
Dielectric Withstanding Voltage: 500V AC for 1 min
Operating Temperature: -40°C to 105°C

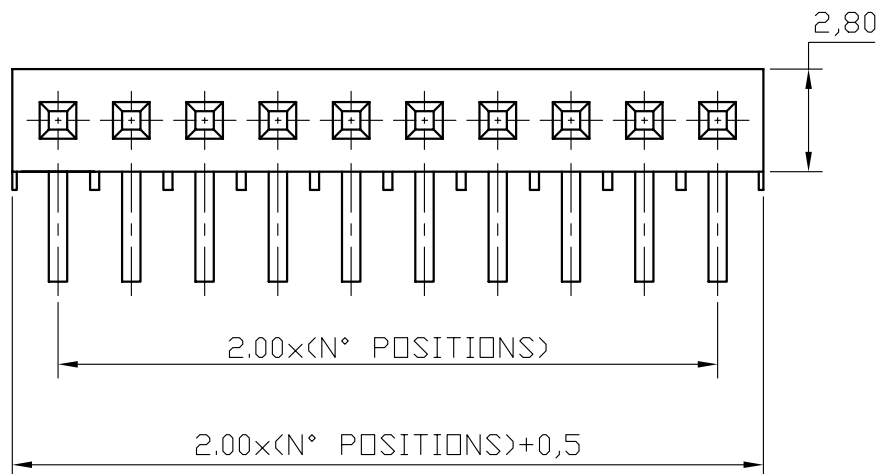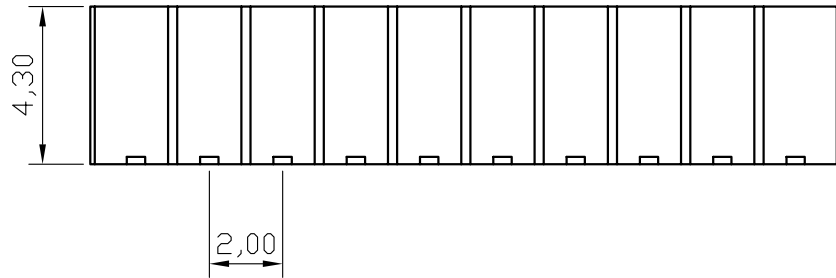

HOW TO ORDER: MAT[][S][N][][S2][L][R]

1 2 3 4 5 6

- | | |
|---------------------------------------|--|
| 1- Nr. of Ways
Single Row: 2 to 36 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row | 5- Profile:
(L)-4,3mm (Width: 2,8mm) |
| 3- Pin Style
(N)-90° | 6- (R)RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 5:1	TITLE 2.0mm FEMALE HEADER 90° H:4.3x2.8mm WAVY TYPE	DATE AUGUST 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO