

REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		


SPECIFICATIONS

Material

Insulator: PBT, glass reinforced, rated UL94V-0
 Contact: Phosphor Bronze



Electrical

Current Rating: 1Amp DC
 Contact Resistance: 30mΩ max.
 Insulation Resistance: 3000MΩ min.
 Dielectric Withstanding Voltage: 500V AC for 1 min
 Operating Temperature: -40°C to 105°C

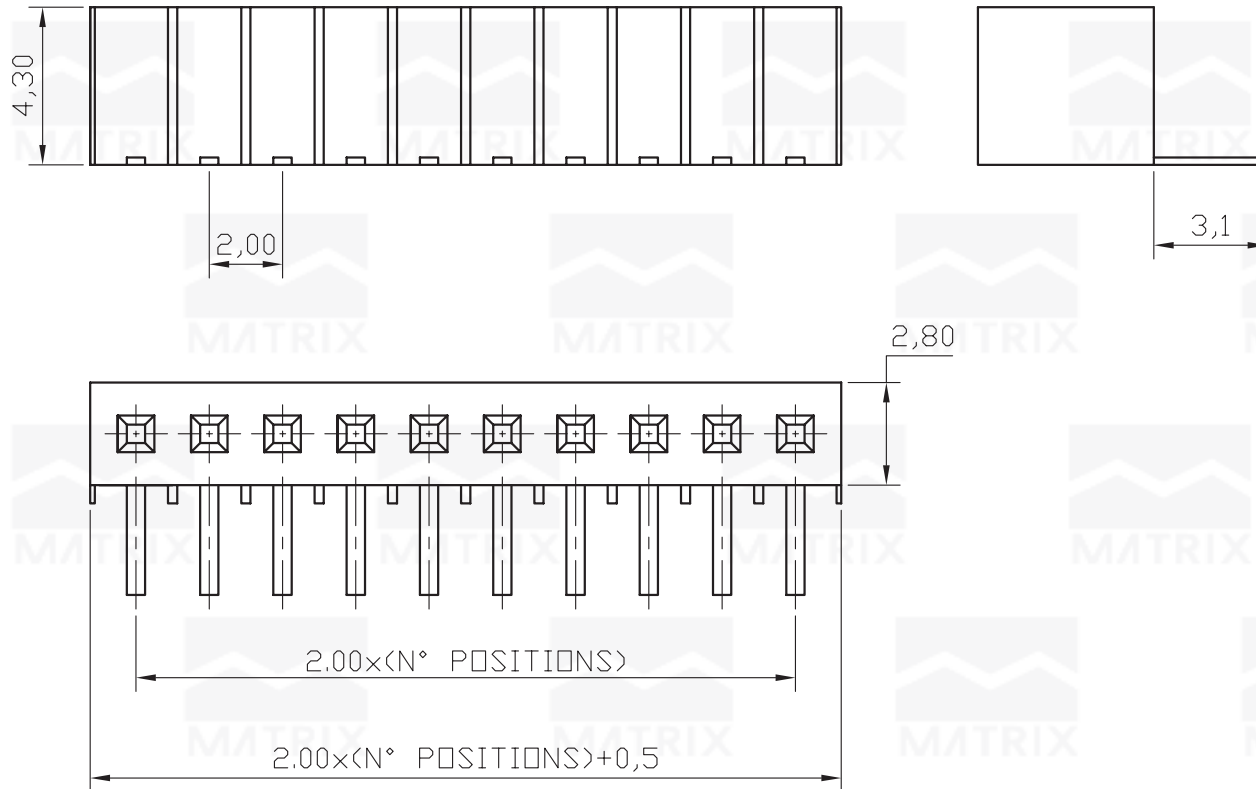

**HOW TO ORDER:
 MAT-[]-[S]-[N]-[]-S-2.0-P4.3-[]**

- | | | | | |
|---------------------------------------|-----------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------|----------------------|
| 1 | 2 | 3 | 4 | 5 |
| 1- Nr. of Ways
Single Row: 2 to 36 | 2- Row Version:
(S)-Single Row | 3- Pin Style
(N)-90° | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn | 5- (R)RoHS Compliant |

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE 5:1	TITLE 2.0mm FEMALE HEADER 90° H:4.3x2.8mm WAVY TYPE	DATE AUGUST 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO