
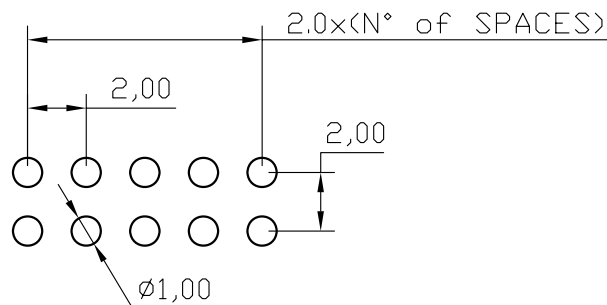
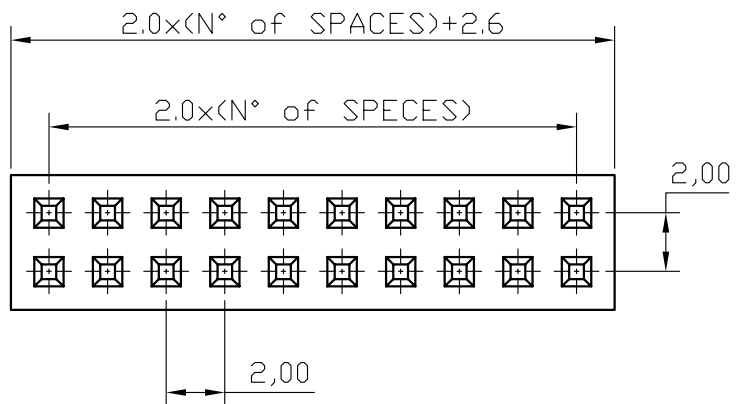
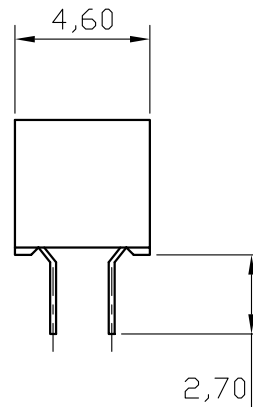


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

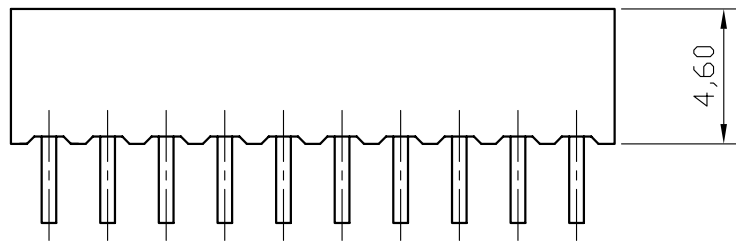

P.C.Board layout
(Dual row)

SPECIFICATIONS

Current Rating: 1Amp

Insulator Resistance: 5000M Ω min.

500V DC for 1 minute

Contact Resistance: 20m Ω Max.

Dielectric Withstanding: AC 500V for 1 minute

Operating Temperature: -40°C to 105°C

Contact Material: Phosphor Bronze

Insulator Material: Polyester, UL94V-0

HOW TO ORDER: MAT[][D][R][]S2[C][R] 1 2 3 4 5 6

1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80

2- Row Version:
(S)-Single Row
(D)-Double Row

3- Pin Style
(N)-90°
(R)-180°

4- Terminal Plating:

(E)-Sn
(D)-FLASH Au
(F)-0,38 μ m Au
(G)-0,76 μ m Au
(C)-0,38 μ m Au/Sn
(H)-0,76 μ m Au/Sn

5- Profile:
(C)-4,6mm

6- (R)RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

0.0 \pm	SCALE	TITLE	DATE JUNE 2007
0.00 \pm	UNIT mm	2.00mm FEMALE HEADER H=4.6mm DUAL ROW	APP. BY
0.000 \pm		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO